

RoHS

圖 1(鉚合)

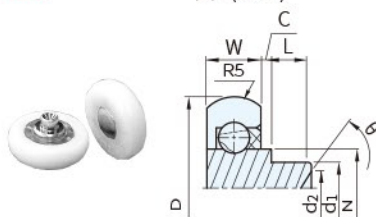


圖 2(螺柱)

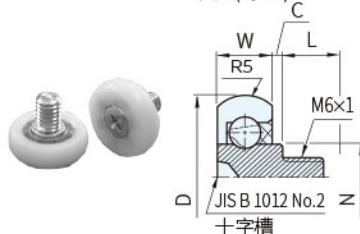


圖 3(螺柱)

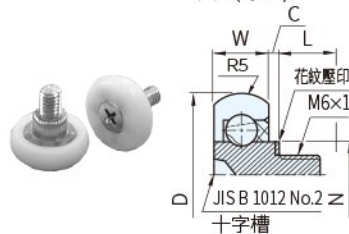


圖 4(螺柱)

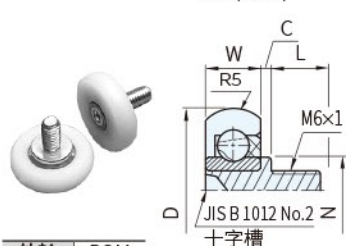


圖 5(孔型)


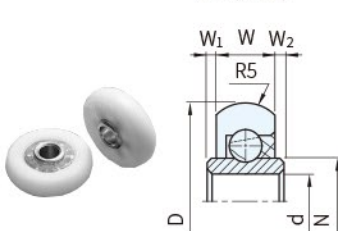


圖 6(孔型)

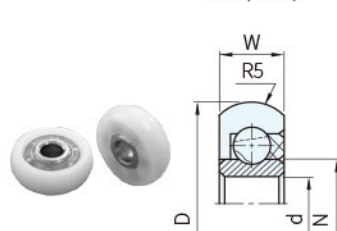

外輪	POM
軸承	鋼

品號	備註	D 0 -0.2	d +0.1 0	d1 0 -0.1	W 0 -0.2	C ±0.4	L ±0.2	d2×θ*1	W1	W2	N	荷重 (N)	庫存
K-DO-19-A0.5	圖1	19	-	5	6	0.5	3.5	ø4×120°	-	-	8.2	29.4	.
K-DO-22-A1		22			1	ø4.4×90°							
K-DO-22-A3		24			3	ø4×90°							
K-DO-24-A1		26			1	ø4.4×90°							
K-DO-26-A1	圖2	19	-	-	6	0.5	-	8±0.5	-	-	8.2	49	.
K-DO-19-B0.5		22			4.5±0.5								
K-DO-22-B0.5		24			8±0.5								
K-DO-22-B3-10.5		26			3	10.5±0.5							
K-DO-24-B0.5		28			0.5								
K-DO-26-B0.5		22			5	8±0.5							
K-DO-28-B0.5		24			2								
K-DO-22-B5	24	3											
K-DO-24-B2	圖3	30	-	7	4	-	-	-	-	-	9.5	196	.
K-DO-24-B3		24			3								
K-DO-24-B4		30			4								
K-DO-30-B3	圖4	26	-	-	2	11±0.5	-	-	-	-	13.0	.	
K-DO-26-BH2-11		24			6								
K-DO-24-H6W1		26			5								
K-DO-26-H6W1		35											
K-DO-35-H6W1	圖5	40	-	-	8 ⁰ _{-0.3}	-	-	0.5	0.5	9.5	.		
K-DO-40-H6W0.5		18			6			7	-			-	-
K-DO-18-H5	19												
K-DO-19-H5	22												
K-DO-22-H6	24												
K-DO-24-H6	26												
K-DO-26-H6	28												
K-DO-28-H6	圖6	29	-	-	7 ⁰ _{-0.1}	-	-	-	-	9.5	196	.	
K-DO-29-H6		29											

Ps) 備註

- 溫度範圍：0°C~40°C
- 滾輪請勿施予軸向荷重
- 容許荷重是本公司300RPM/100萬回的測試值
- 1N=0.101972kgf
- *1是參考值

Wa) 注意

· 非庫存品必須以101pcs為單位購買之

訂貨： 交期： 天 庫存

K-DO-22-A1

其它