

RoHS

圖 1(鉚合)

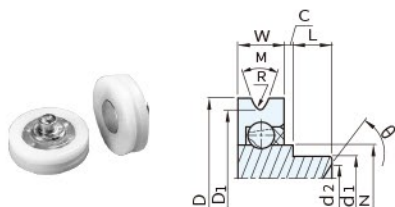


圖 2(螺栓)

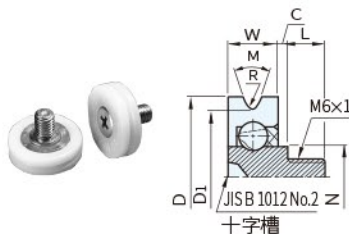


圖 3(孔型)

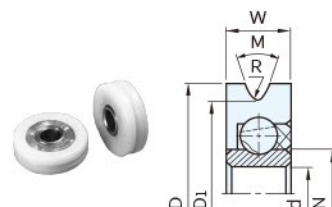


圖 4(孔型)


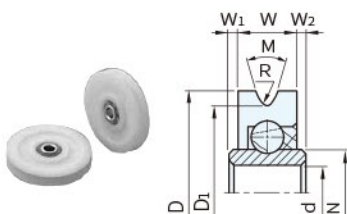


圖 5(孔型)

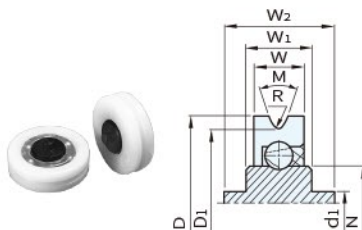

外輪	POM
軸承	鋼

品號	備註	D ±0.2	D1 ±0.2	d +0.1 0	d1 0 -0.1	W 0 -0.2	C ±0.4	L ±0.2	d2×θ*1	W1	W2	M°	R	N	庫存
K-DV-19-A0.5	圖1	19	17	-	5	6	1	3.5	ø4×120°	-	-	60	0.6	8.2	·
K-DV-22-A1		22	19			7									
K-DV-24-A1		24	21			7									
K-DV-26-A1		26	23			7									
K-DV-28-A1		28	24			7									
K-DV-30-A1		30	27			7									
K-DV-38-A0.5	圖2	38	35	-	-	8±0.2	0.5	8±0.5	-	-	-	-	-	9.5	·
K-DV-19-B0.5		19	17			6									
K-DV-22-B0.5		22	19			6									
K-DV-24-B0.5		24	21			7									
K-DV-26-B0.5		26	23			7									
K-DV-30-B0.5-0.5R		30	28			7									
K-DV-32.5-B1.5-2R	32.5	20.5	9.5±0.2	1.5	15	2	90	0.5	·						
K-DV-38-B0.5	圖3	38	35	-	-	8±0.2	0.5	-	-	-	-	60	0.6	8.2	·
K-DV-19-H5		19	17			6									
K-DV-22-H6-M		22	19			6									
K-DV-24-H6		24	21			7									
K-DV-24-H8		24	20±1			7									
K-DV-26-H6		26	23			7									
K-DV-30-H6	30	27	7												
K-DV-48-H6W0.4-1.6R	圖4	48.3	35	8.2±0.2	0.4	0.4	30	1.6	9.5	·					
K-DV-22-AW0.5-B	圖5	22 ⁰ _{-0.1}	19±0.1	-	3	7	8	12	60	0.65	·				

Ps. 備註

- 溫度範圍：0°C~40°C
- 滾輪請勿施予軸向荷重
- 容許荷重是本公司300RPM/100萬回的測試值
- 1N=0.101972kgf
- *1是參考值

訂貨： 交期： 天 庫存

K-DV-19-B0.5

其它

Wa. 注意

- 非庫存品必須以101pcs為單位購買之