



(RoHS)

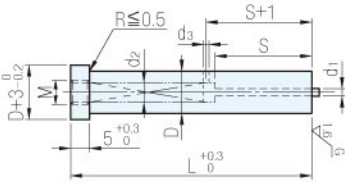

基本頂料型冲頭


●DKPIT、W-DKPIT、DKPIXT、W-DKPIXT無d₃(橫向孔)

Catalog No.		材質	硬度
D _{m5}	D ^{+0.005} ₀		
PIT	W-PIT	D4~6 相當於SKH51	61~64HRC
PIXT	W-PIXT		
PITD	W-PITD		
PIVT	W-PIVT		
PIVXT	W-PIVXT		
PIKT	W-PIKT		
DKPIT	W-DKPIT	D8~25 相當於SKD11	60~63HRC
DKPIXT	W-DKPIXT		
SIT	W-SIT		
SIXT	W-SIXT		
SITD	W-SITD		

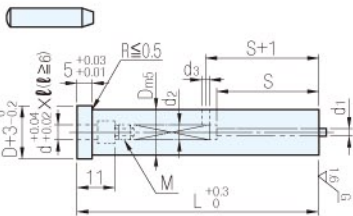


基本型定位銷孔頂料型冲頭
PIT-E、PIXT-E、PIT-E、PIXT-E

D	d	材質	硬度	附件
10~32	6	相當於SKD11	60~63HRC	D10~32→NP6-25
38、45	10			D38、45→PIT-ENP

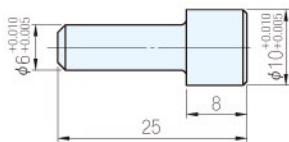

D38、45用定位銷
PIT-ENP

材質	硬度
SUJ2	58HRC



Catalog No.
PIT-ENP

頂料銷直徑	d ₁ (孔徑)	d ₂	d ₃	S	M	Catalog No.		指定單位10mm L		
						TYPE	D			
0.35	0.4	2.1	1.0	13	2.5	(D _{m5})	(4)	40~80		
0.65	0.7			20		(5)				
0.65	0.7	2.6	1.5	20	4	彈簧加強型	(6)	(40)~80		
1.0	1.1	3.4		27		PIXT	8			
1.4	1.5	4.4		28		5	(D ₀ ^{+0.005})		10	(40)~100
1.7	1.8						13			
2.7	2.8	4.4	1.5	36	5	彈簧加強型	16	(40)(50)~100		
						W-PIT	20			
						W-SIT	25			

· L(40)→φD5~13=S15、φD16~25=S17 · L(50)→φD16~25=S24
· D(4)(5)(6)只PIT、SIT、W-PIT、W-SIT適用

頂料銷直徑	d ₁ (孔徑)	d ₂	d ₃	S	M	Catalog No.		指定單位10mm L
						TYPE	D	
0.35	0.4	2.1	1.0	20	2.5	(D _{m5})	4	50~80
						PITD		
						(D ₀ ^{+0.005})		
						W-PITD		
						W-SITD		

頂料銷直徑	d ₁ (孔徑)	d ₂	d ₃	S	M	Catalog No.		指定單位10mm L	
						TYPE	D		
0.65	0.7	2.1	1.0	32	2.5	(D _{m5})	(5)	60~80	
0.65	0.7	2.6				3	PIVT		(6)
1.0	1.1	3.4	1.5	40	4	彈簧加強型	8	70~100	
1.4	1.5	4.4				5	PIVXT		10
1.7	1.8						(D ₀ ^{+0.005})		13
2.7	2.8	50				5	W-PIVT		16
						彈簧加強型	20	80~100	
						W-PIVXT	25		

· D(5)(6)只PIVT、W-PIVT適用

頂料銷直徑	d ₁ (孔徑)	d ₂	S	M	Catalog No.		指定單位10mm L		
					TYPE	D			
0.65	0.7	2.1	32	2.5	(D _{m5})	(5)	(50)~80		
0.65	0.7	2.6			3	DKPIT		(6)	
1.0	1.1	3.4	1.5	40	4	彈簧加強型	8	60~100	
1.4	1.5	4.4				5	DKPIXT		10
1.7	1.8						(D ₀ ^{+0.005})		13
2.7	2.8	50				5	W-DKPIT		16
						彈簧加強型	20	70~100	
						W-DKPIXT	25		

· L(50)→S=30 · D(5)(6)只DKPIT、W-DKPIT適用

頂料銷直徑	d ₁ (孔徑)	d ₂	S	M	Catalog No.		指定單位10mm L	
					TYPE	D		
2.7	2.8	4.4	27	5	(D _{m5})	8	(50)~100	
						10		
4.0	4.2	6.9	28	8		PIKT		13
						16		
6.0	6.2	8.7	36	10		20		
					25			

· L(50)→φD16~25=S24

頂料銷直徑	d ₁ (孔徑)	d ₂	d ₃	S	M	Catalog No.		指定單位10mm L
						TYPE	D	
1.4	1.5	4.4	1.5	28	5	彈簧加強型	10	(60)~120
1.7	1.8						13	
2.7	2.8	4.4	1.5	36	5		16	
							20	
							PIXT-E	
						PIXT-E	32	
						(38)		
						(45)		

· L(60)→φD16~45=S24 · D(38)(45)只PIT-E適用

頂料銷直徑	d ₁ (孔徑)	d ₂	d ₃	S	M	Catalog No.		指定單位10mm L
						TYPE	D	
1.4	1.5	4.4	1.5	40	5	彈簧加強型	10	100~120
1.7	1.8						13	
2.7	2.8	4.4	1.5	50	5		16	
							20	
							PIVT-E	
						PIVXT-E	32	