


RoHS

PAW(沖頭用襯墊)

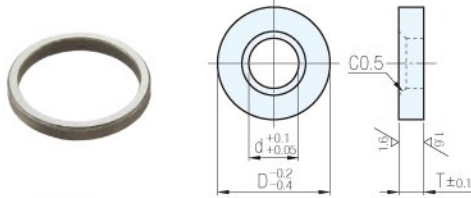


材質	硬度
SKS3	58~62HRC

D	Catalog No.		T(厚度) 公差±0.1
	TYPE	d	
5	PAW	3	0.5 (只d3~13) 1 2 3 4 5
7		4	
8		5	
9		6	
11		8	
13		10	
16		13	
19		16	
23		20	
28		25	

Wa. 注意

- ・d16以上時不能選擇T0.5
- ・(C0.5)→T=0.5時,倒角為C0.2~0.3

PBW(沖頭用墊片)

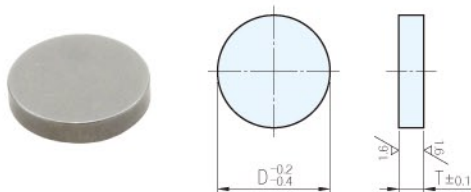


材質	硬度
SKS3	58~62HRC

D	Catalog No.		T(厚度) 公差±0.1
	TYPE	D	
5	PBW	5	0.5 (只D5~16) 1 2 3 4 5
7		7	
8		8	
9		9	
11		11	
13		13	
16		16	
19		19	
23		23	
28		28	

Wa. 注意

- ・D19以上時不能選擇T0.5

PCW(螺紋固定型沖頭用襯墊)

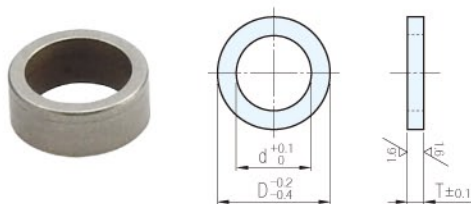

材質	硬度
SKS3	58~62HRC


d	Catalog No.		T(厚度) 公差±0.1
	TYPE	D	
3.5	PCW	5	0.5 (只D5~16) 1 2 3 4 5
		6	
4.5		8	
5.5		10	
		13	
		16	
6.5		20	
		25	

Wa. 注意

- ・D20以上時不能選擇T0.5

Ex. 使用例

- ・請用於刃口重新研磨時的調整



訂貨: Catalog No. - T 交期: 15 天

PAW 3 - 1
PBW 5 - 1
PCW 6 - 0.5