



(RoHS)

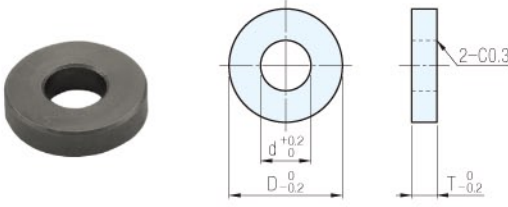


Catalog No.	材質	硬度	表面處理
PSBK	S45C	45~55HRC	-
PSBKH	SKS3	58~62HRC	鉻酸鹽光澤處理(銀色)

螺栓	D	d	T	Catalog No.	
				TYPE	No.
M 4	10	4.2	3	PSBK	4
			4.5		4-4.5
			3		5
M 5	12	5.2	4.5		5-4.5
			3		6
M 6	14	6.2	4.5		6-4.5
M 4	10	4.2	3	PSBKH	4
			4.5		4-4.5
			3		5
M 5	12	5.2	4.5		5-4.5
			3		6
M 6	14	6.2	4.5		6-4.5

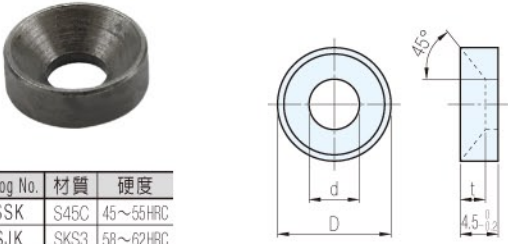

Catalog No.	材質	硬度
PSSK	S45C	45~55HRC
PSJK	SKS3	58~62HRC

螺栓	D	d	T	Catalog No.	
				TYPE	No.
M 4	10	4.5	2.5	PSSK	4
M 5	13	5.5	3		5
M 4	12	4.2	2.5	PSJK	4
M 5	15	5.2	3		5

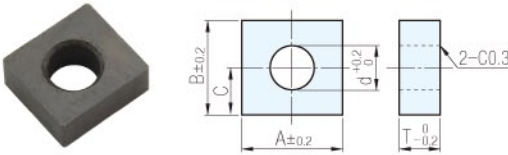

Catalog No.	材質	硬度	表面處理
PKS	S45C	45~55HRC	-
PSPK			
PSHK	SKS3	58~62HRC	鉻酸鹽光澤處理(銀色)

螺栓	A	B	C	d	T	Catalog No.		
						TYPE	No.	
M 4	10	11	6	4.2	3	PKS	4-3	
							4.5	4
							3	5-3
M 5	12	14	7	6.2	4.5		5	
							3	6-3
M 6	14	14	7	6.2	4.5		6	
M 4	11	11	5.5	4.2	3	PSPK	4-3	
							4.5	4
							3	5-3
M 5	14	14	7	5.2	4.5		5	
							3	6-3
M 6	14	14	7	6.2	4.5		6	
M 4	10	11	6	4.2	3	PSHK	4-3	
							4.5	4
							3	5-3
M 5	12	14	7	5.2	4.5		5	
							3	6-3
M 6	12	14	7	6.2	4.5		6	


Wa. 注意

・由於以PSPK為中心進行通孔處理,因此可以不選擇方向

SPFA(長型)



材質	硬度
S45C	45~55HRC

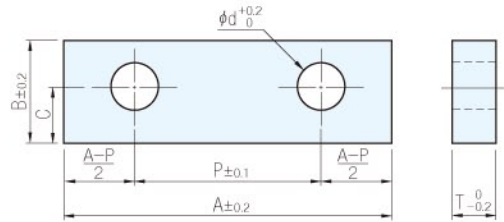


螺栓	B	C	d	P				Catalog No.		T (選擇)	A 指定單位1mm	A21~30	A31~40	A41~50	A51~60
				A=21~30	A=31~40	A=41~50	A=51~60	TYPE	No.						
M 4	11	6	4.2	10	20	30	-	SPFA	4	3	21~50	○	○	○	-
M 5			5.2	-	20	30	40			5	4.5	31~60	-	○	○

Wa. 注意

・“-”表示無此規格

Ex. 使用例

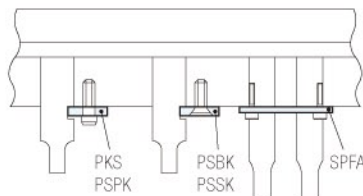

訂貨: Catalog No. - T - A 交期: 15 天

PSBK 4
PSSK 5
PSPK 5
SPFA 4 - 4.5 - 44