



RoHS

R·L型(1個文字)
BESW

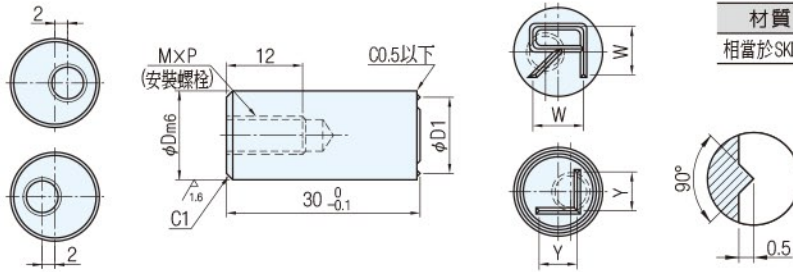


材質	硬度
相當於SKD11	60~63HRC

R·L型(1個文字)
BEST (安裝螺柱M5)
BESTB (安裝螺柱M8)

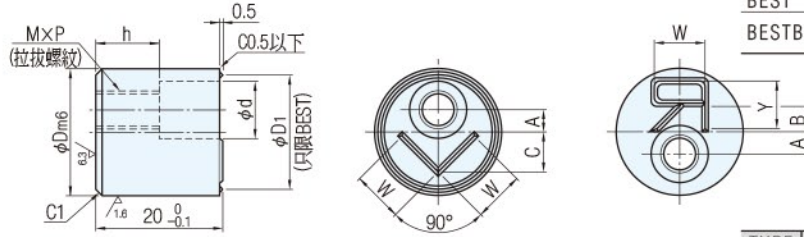

TYPE	文字範例
BESW	Ⓡ
BEST	R不帶框
BESTB	L R L·R都不帶框

文字指定型

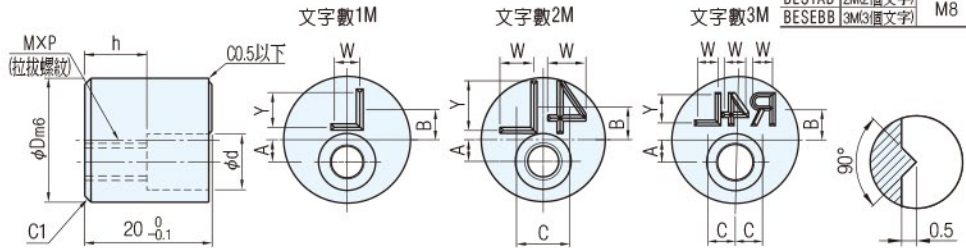

TYPE	文字數	安裝螺柱
BESTP	1M(1個文字)	M5
BESTA	2M(2個文字)	
BESEB	3M(3個文字)	
BESTAB	2M(2個文字)	M8
BESEBB	3M(3個文字)	


A	B	C	M × P	φ d	h	φ D1	W	Y	φ Dm6	安裝螺柱	文字數	Catalog No.		CHR (文字)		
												TYPE	D			
-	-	-	M 4 × P0.7	-	-	8	5	3	10	+0.015 +0.006	M4	1M	BESW	10	R L	
-	-	-	M 6 × P1.0	-	-	12	8	6	14	+0.018 +0.007	M6		BESW	14		
1.5	4.5	5.7	M 6 × P1.0	9	10	14	4	3.2	16	+0.018 +0.007	M5		BEST	16		
3.5	4.0	6.5				18	8	8	20	+0.021 +0.008		BEST	20			
2.5	6.5	8.5	M10 × P1.5	13.5	7	-	5.5	5	20	+0.021 +0.008	M8	BESTB	20			
2.0	5.2	-	M 6 × P1.0	9	10	-	2.5	3.5	16	+0.018 +0.007	M5	1M	BESTP	16	0123456789 ABCDEFGHIJ KLMNOPQRS TUVWXYZ	
3.5	5.2	-					4	6	20	2M				BESTA		20
5.5	4.0	-					6	8	24							3M
3.5	4.75	5.6					4	5.5	20			2M	BESTAB			
5.5	4.0	8.0					6	8	24	3M				BESEBB		24
5.5	4.0	5.0					4	6	24			2M	BESTAB			24
4.5	5.8	8.0	5.5	5.5	24	M8	BESEBB	24								
4.5	6.0	5.0	M10 × P1.5	13.5	7			3.3	5	24	+0.021 +0.008	M8	3M	24		

Ex. 使用例

1、安裝位置

- ①即使產品有標記也要安裝在不受影響的地方
- ②盡量選擇水平面，將沖頭接觸部位垂直安裝

2、鎖固螺柱請使沖頭凸出安裝面0.25mm
(刻印件的沖入量為0.25mm)



訂貨：Catalog No. - CHR 實際的刻印 交期：9 天 BESTA
BEST 20 - L J 15 天 BESTA以外
BESEBB 24 - R6L J θ R