

RoHS








TYPE	文字數	安裝螺栓
BESBP	1M(1個文字)	M5
	2M(2個文字)	
	3M(3個文字)	
BESBD	2M(2個文字)	M8
	3M(3個文字)	


材質	硬度
相當於SKD11	60~63HRC

傾斜面用刻印沖頭

BESBP
BESBD




墊片
BEJN
BEJNB

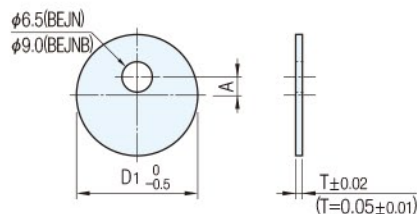

傾斜面用刻印沖頭

Ex. 使用例

· 需要在鑄模等的斜面上刻印時可以利用



材質
SUS304

A	B	C	M×P	φ d	h	W	Y	φ Dm6	安裝螺栓	Catalog No.			L	指定單位1° G	CHR 文字	
										TYPE	文字數	D				
3.5	5.2	-	M 6×P1.0	9	10	4	6	20	M5	BESBP	1M	20	20 25	1~10°	0123456789 ABCDEFGHIJ KLMNOPQRS TUVWXYZ	
5.5	4	-				6	8	24			1M	24				
3.5	4.75	5.6				4	5.5	20			2M	20				
5.5	4	8				6	8	24			2M	24				
5.5	4	5	4	6	24	3M	24									
4.5	5.8	8	M10×P1.5	13.5	7	5.5	5.5	24		M8	BESBD	2M				24
4.5	6	5				3.3	5	24				3M				24

訂貨: Catalog No. - L - G - CHR 交期: 15 天 實際的刻印

BESBP1M20 - 25 - G5 - L
BESBD3M24 - 20 - G8 - R4L

墊片

適用	D1	A	Catalog No.		T
			TYPE	No.	
BEST用 BESTA用	14	1.5	BEJN	16	0.05
	18	3.5		20	0.1
	22	5.5		24	0.2
BESTB用 BESTAB用	18	2.5	BEJNB	20	0.3
	22	4.5		24	0.5 1.0

Wa) 注意

· No. 為BEST、BESTB、BESTA、BESTAB的公稱外徑

訂貨: Catalog No. - T 交期: 15 天

BEJN 16 - 0.05