





材質	硬度
相當於SKD11	60~63HRC


TSPN(螺紋固定型)

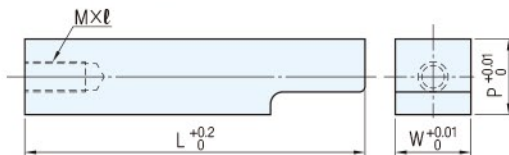

TSPK(單邊肩型)

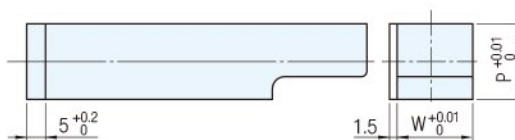


TSPF(鍵槽型)

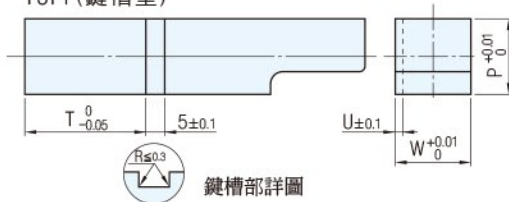

TSPA(雙邊肩型)



①前端形狀按下圖選擇

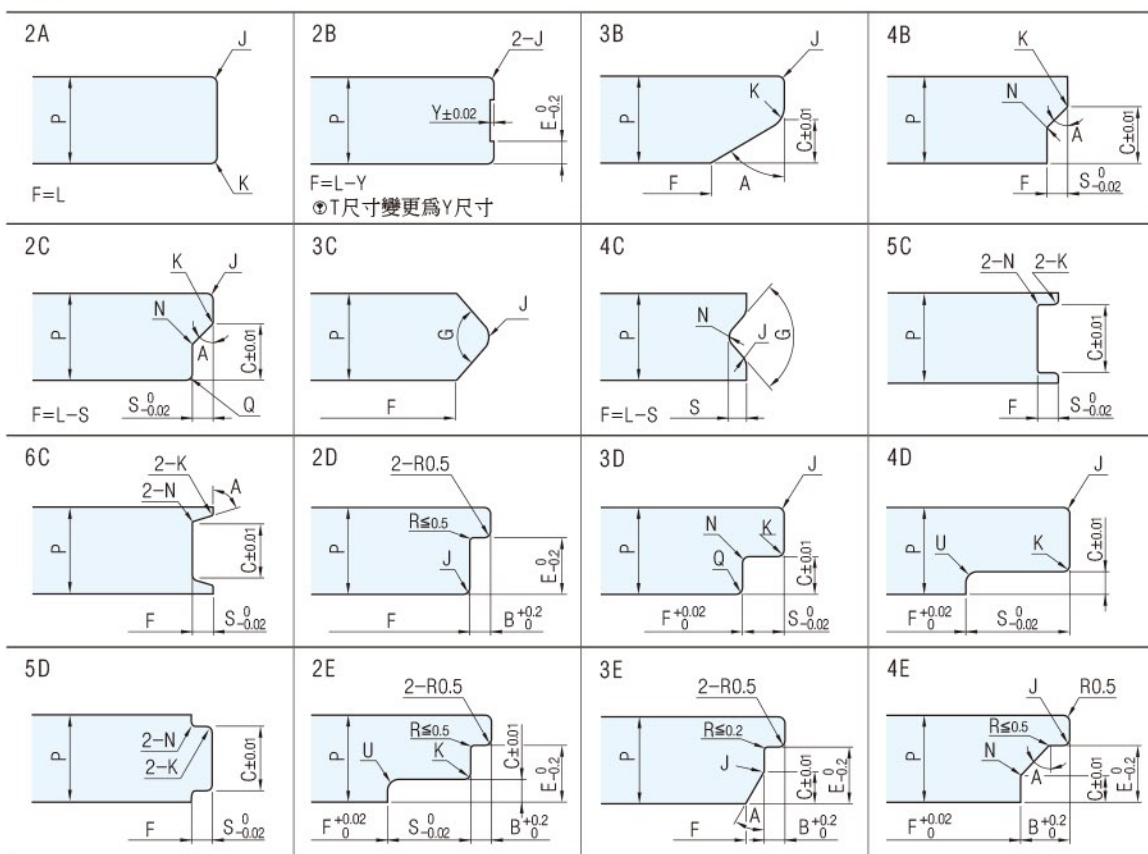

②指定單位

- C、J、K、N、Q、S、U、Y → 0.01mm單位
- B、E → 0.1mm單位
- A、G → 0.5°單位


③加工極限

- J、K、Q ≥ 0.2
- N、U ≥ 0.2
- 1 ≤ B ≤ 25
- Y ≤ 1
- U ≤ C
- 0.2 ≤ C、E ≤ P-2
- K+N ≤ S ≤ 25
- K+U ≤ S ≤ 25
- A ≤ 70°
- G ≥ 40°
- 只形狀2B
0.5 ≤ Y ≤ 1
2.00 ≤ E ≤ 3.99 → Ymax.5
E ≥ 4.00 → Ymax.10
- 只形狀5C、6C
1.00 ≤ C ≤ P-4
- 只形狀5D
2.0 ≤ C
- 只TSPN型
F ≥ Fmin.
- 只TSPF型
F-(T+5) ≥ 2


• 形狀5C、6C

$\frac{P-C}{2}$	Smax.
2.00~3.99	5
4.00~	10


變更鍵槽位置



Ex. 使用例

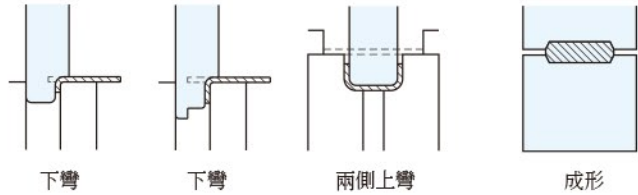

變更肩型位置

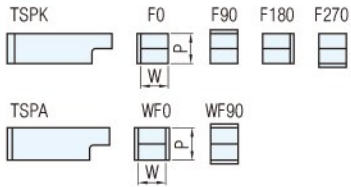

Catalog No.		指定單位0.1mm	P	5.01	6.01	8.01	10.01	15.01	20.01	25.01	0.1mm單位 T	F min.	U	
TYPE	Shape(形狀)	L		6.00	8.00	10.00	15.00	20.00	25.00	30.00				
螺紋固定型 TSPN	2A	20.0	5.01~ 6.00	○	○	○	○	○	○	○	T ≥ 20 (只TSPF)	15	1.0	
		螺紋固定型 W 5.01~ 8.00	6.01~ 8.00	○	△	△	△	△	△	△				20
鍵槽型 TSPF	2B 3B 4B 2C 3C 4C 5C 6C	→L20.0~ W 8.01~10.00	8.01~10.00	○	△	□	□	□	□	□		25		
		單邊肩型 TSPK	2D 3D 4D 5D 2E 3E 4E	→L24.0~ W10.01~30.00	10.01~15.00	○	△	□	●	●				●
雙邊肩型 TSPA		?	15.01~20.00	○	△	□	●	●	●	●				
		100.0	20.01~25.00	○	△	□	●	●	●	●				
			25.01~30.00	○	△	□	●	●	●	●				

Wa) 注意

- 螺紋固定型TSPN時，Lmin. 因W尺寸而異，請注意但W>P時，適用P尺寸
- 鍵槽型TSPF不需要鍵槽時，請指示T尺寸與全長L相同(T=L)
- 表中的符號與螺紋M×t之間的關係：
○：M4×8
△：M5×10
□：M6×12
●：M8×16

訂貨：Catalog No. - L - P·W·B·C·E·J·K·N·Q·S·Y·U·A·G - (HC, TC...)

螺紋固定型 TSPN 2B - 64.2 - P6.78-W16.00-E2.0-J1.50-Y0.5

追加加工 TSPN 2A - 64.2 - P8.01-W6.01-J3.00-K2.00-F0 - HC1.0-TKC

訂貨：Catalog No. - L - T - P·W·B·C·E·J·K·N·Q·S·Y·U·A·G - KK

鍵槽型 TSPF 2B - 64.2 - T23.5 - P6.08-W7.25-E2.0-J1.50-Y0.5 - KK0

訂貨：Catalog No. - L - P·W·B·C·E·J·K·N·Q·S·Y·U·A·G - F·WF

肩型固定型 TSPK 2B - 64.2 - P6.01-W5.01-E2.0-J1.50-Y0.5 - F0

TSPA 3D - 74.5 - P15.50-W12.50-C6.00-J0.50-N1.30-Q0.50-S19.27 - WF90

交期：20 天

追加工

Alteration	Code	Spec.
	HC	變更肩型寬度 0 ≤ HC < 1.5 指定單位0.1mm
	TC	變更肩型厚度 2 ≤ TC < 5 指定單位0.1mm
	TKC	變更T尺寸公差 T _{-0.05} ⁰ → T _{-0.02} ⁰
		變更肩型厚度公差 5 ₀ ^{+0.2} → 5 ₀ ^{+0.02}

Alteration	Code	Spec.										
	LKC	變更全長公差 ⊗ 6C、2D、3D、4D、2E、3E、4E不適用 L ₀ ^{+0.2} → L ₀ ^{+0.02}										
	MC	變更螺紋直徑 <table border="1"> <thead> <tr> <th>W</th> <th>變更內容</th> </tr> </thead> <tbody> <tr> <td>5.01~ 6.00</td> <td>M4→M3</td> </tr> <tr> <td>6.01~ 8.00</td> <td>M5→M4</td> </tr> <tr> <td>8.01~10.00</td> <td>M6→M5</td> </tr> <tr> <td>10.01~13.00</td> <td>M8→M6</td> </tr> </tbody> </table>	W	變更內容	5.01~ 6.00	M4→M3	6.01~ 8.00	M5→M4	8.01~10.00	M6→M5	10.01~13.00	M8→M6
W	變更內容											
5.01~ 6.00	M4→M3											
6.01~ 8.00	M5→M4											
8.01~10.00	M6→M5											
10.01~13.00	M8→M6											
	RTC	變更T尺寸公差 T _{-0.05} ⁰ → T ₀ ^{+0.05}										