


RoHS

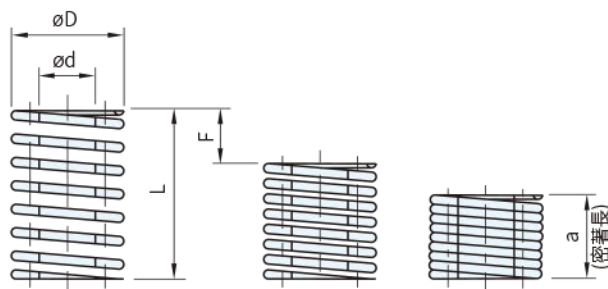

材質
PEEK

品號		D	d	L	a	定數	庫存
Type	D - L	外徑 mm	內徑 mm	自由長 mm	密著長 mm	N/mm	
PEEKPSX	5- 5	5	3	5	3.2	1.030	
	6- 5	6	4	5	3.3	0.540	
	6-10			10	6.5	0.300	
	7- 5	7	5	5	3.4	0.310	
	7-10			10	6.4	0.170	
	8- 5	8	6	5	3.4	0.190	
	8-10			10	6.5	0.110	
	8-15			15	9.7	0.070	
	9- 5	9	7	5	3.4	0.150	
	9-10			10	6.6	0.070	
	9-15			15	9.6	0.040	
	10- 5	10	8	5	3.4	0.100	
	10-10			10	6.6	0.051	
	10-15			15	9.3	0.034	
	10-20			20	12.1	0.026	
	11- 5	11	9	5	3.4	0.080	
	11-10			10	6.5	0.037	
	11-15			15	9.7	0.025	
	11-20			20	12.7	0.017	
	12- 5	12	10	5	3.4	0.060	
12-10	10			6.8	0.028		
12-15	15			9.4	0.019		
12-20	20			12.2	0.014		
12-25	25			15.2	0.011		

Wa. 注意

- 此產品端部是開口型

訂貨： TYPE D - L 交期： 30 天
PEEKPSX 5 - 5

Sp. 特長

- 最佳的耐疲勞性；耐蝕性、耐熱性塑膠扁線彈簧
- 輕量、絕緣、斷熱、非磁、耐酸、耐熱、耐油、耐溶劑、耐剛性、耐酒精
- PEEK工程塑膠請參考技術資料單元

Ps. 備註

- 其他材質歡迎洽詢

- 參考公式

$$\text{最大安全壓縮量} = \left(\frac{L-a}{L} \right) \times 80\%$$