
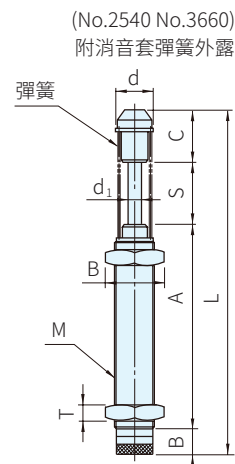
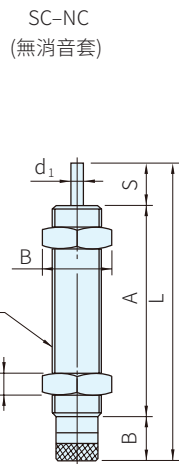


RoHS

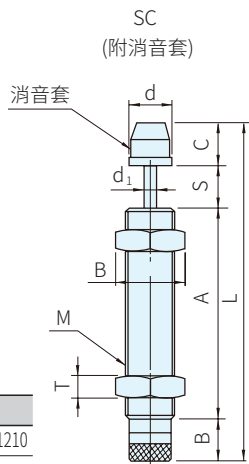

材質	處理	消音套	操作溫度	品號
鋼	鍍鎳 染黑	尼龍 PU	-10°~70°C	0806, 1008, 1210 其它

品號		使用氣缸內徑 ∅	種類	容許速度 m/sec	螺桿徑 M×P	行程 S mm	最大吸收能量 NM	有效重量值 kg	L (L)	A	B	d	d ₁	C	B 平面	T	庫存	
Type	No																SC	SC-NC
SC (附消音套)	0806	12	1	2.0	M8 ×1	6	1.8	0.9~ 5.6	53 (44.5)	34	4.5	6.6	2.8	8.5	11	3	△	△
				1.2				2.5~ 10										
				0.8				5.6~ 22.5										
	1008	16	2	2.6	M10 ×1	8	3.2	0.9~ 10	62 (53.5)	40.9	4.6	8.6	3	12.7	14	4	△	△
				1.5				2.8~ 17.8										
				0.8				10 ~ 40										
	1210	20	2	2.6	M12 ×1	10	6	1.8~ 18.8	72.1 (62.6)	47.8	4.8	10	3	9.5	14	4	△	△
				1.5				5.3~ 33										
				0.8				12 ~ 75										
	1412	25	1	2.6	M14 ×1.5	12	16	4.7~ 32	92.7 (79.3)	59.3	8	12.2	3.5	13.4	19	6	△	△
				1.5				14 ~ 50										
				0.8				56 ~ 200										
1415	25	2	2.6	M14 ×1.5	15	20	5.9~ 40	103.4 (90)	67	8	12.2	3.5	13.4	19	6	△	△	
			1.5				17.8~ 81.6											
			0.8				62.5~ 250											
1425	25	1	3.5	M14 ×1.5	25	28	4.6~ 39	133.4 (120)	87	8	12.2	3.5	13.4	19	6	△	△	
			2.0				14 ~ 114											
			1.5				25 ~ 350											
2020	32	1	3.2	M20 ×1.5	20	35	6.8~ 27	130 (114)	85	9	17.8	5	16	26	8	△	△	
			2.0				17.5~ 70											
			1.2				48.6~ 777											
SC-NC (無消音套)	○2030	32	1	3.2	M20 ×1.5	30	46	9 ~ 36	158	103	9	17.8	5	16	26	8	△	△
				2.0				23 ~ 92										
				1.2				64 ~ 575										
○2050	32	1	3.5	M20 ×1.5	50	62	10.1~ 124	222.5	147.5	9	17.8	5	16	26	8	△	△	
			2.6				18.3~ 253											
			1.5				55 ~ 496											
2525	40	1	3.2	M25 ×1.5	25	78	15 ~ 69	152.6 (136)	101	10	23	8	16.6	32	10	△	△	
			2.0				39 ~ 433											
			1.2				108 ~ 1733											
○2540	50	1	3.5	M25 ×1.5	40	122	20 ~ 108	211	127	10	23	8	16.6	32	10	△	△	
			2.2				50 ~ 381											
			1.0				244 ~ 1991											
○2550	50	1	3.7	M25 ×1.5	50	140	20 ~ 124	226.6	150	10	23	8	16.6	32	10	△	△	
			2.4				48 ~ 438											
			1.2				194 ~ 2286											
○2580	50	1	4.0	M25 ×1.5	80	198	24.7~ 99	333.6	100	137	23	8	16.6	32	10	△	△	
			3.0				44 ~ 396											
			1.5				176 ~ 1584											
○3660	63	1	3.0	M36 ×1.5	60	260	57 ~ 231	247	134	11	36	10	22.5	46	15	△	△	
			2.0				130 ~ 813											
			1.0				520 ~ 3250											

PS. 備註

- ○符號僅限附消音套
- NO.2540, 3660為彈簧外露
- L尺寸的()為SC-NC無消音套

訂貨： Type - No - 種類 交期： 6 天

SC - 0806 - 1
SC - 0806NC - 1