


EN




規格	本體		銷子			彈簧	O形環
	材質	處理	材質	處理	硬度	材質	材質
M16	S45C	染黑	S45C	染黑	HRC 36~45	SWP	NBR
其它	鋼						

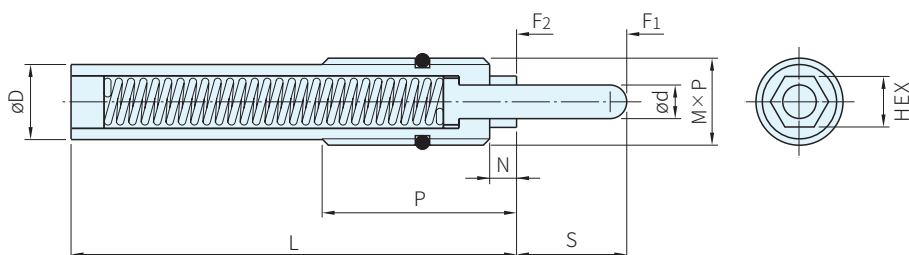


品號	備註	M×P	S	L	d	N	P	D	F1 N	F2 N	HEX	專用扳手	適用O-ring	庫存
MBHG-8-3	重荷重	M8×1.25	3	25	3.1	3.3	25	-	15.0	30.0	4.5	DSX4-4.5-A	THO-4-1	•
MBHG-8-5			5	27	3.1	3.3	27	-	8.0	30.0	4.5			•
MBHG-10-5		M10×1.5	5	30	3.8	3.3	30	-	9.0	50.0	5.5	DSX5-5.5-A	THO-6-1	•
MBHG-10-10			10	43	3.8	3.3	30	7.9	8.0	50.0	5.5			•
MBHG-12-5		M12×1.75	5	30	4	3.5	30	-	19.0	50.0	6	DSX6-6-A	THO-8-1	•
MBHG-12-10	10		43	4	3.5	35	9.8	8.0	50.0	6	•			
MBHG-12-15	15		51	4	3.5	35	9.8	5.0	50.0	6	•			
MBHG-16-10	重荷重	M16×2	10	60	6	5	35	13.4	13.0	45.5	9	DSX8-9-A	THO-10-1.5	•
MBHG-16-15			15	60	6	5	35	13.4	15.0	56.0	9			•
MBHG-16-20			20	80	6	5	35	13.4	34.5	172.5	9			•
MBHG-16-30			30	120	6	5	35	13.4	20.0	80.0	9			•
MBHG-16-30-1			30	150	6	5	35	13.4	56.1	132.2	9			•
MBHG-16-40			40	150	6	5	35	13.4	56.1	158.1	9			•
MBHG-16-50			50	200	6	5	35	13.4	19.3	100.0	9			•
MBHG-16-60			60	200	6	5	35	13.4	19.3	116.0	9			•
MBHG-16-70			70	200	6	5	35	13.4	19.3	132.0	9			•
MBHG-16-80			80	200	6	5	35	13.4	25.0	100.0	9			•
MBHS-16-10	重荷重	M16×1.5	10	60	6	5	35	13.4	13.0	45.5	9	DSX8-9-A	THO-10-1.5	•
MBHS-16-15			15	60	6	5	35	13.4	15.0	56.0	9			•
MBHS-16-20			20	80	6	5	35	13.4	34.5	172.5	9			•
MBHS-16-30			30	120	6	5	35	13.4	20.0	80.0	9			•
MBHS-16-30-1			30	150	6	5	35	13.4	56.1	132.2	9			•
MBHS-16-40			40	150	6	5	35	13.4	56.1	158.1	9			•
MBHS-16-50			50	200	6	5	35	13.4	19.3	100.0	9			•
MBHS-16-60			60	200	6	5	35	13.4	19.3	116.0	9			•
MBHS-16-70			70	200	6	5	35	13.4	19.3	132.0	9			•
MBHS-16-80			80	200	6	5	35	13.4	25.0	100.0	9			•


Ex. 使用例



擊落銷



頂料銷



定位用銷

訂貨： 交期： 天

MBHG-16-10

Ps. 備註

- 1N = 0.101972kgf
- 底部塗紅漆
- 專用扳手請參照本單元