




本體		銷子		彈簧
材質	處理	材質	顏色	材質
SCM435	染黑	SCM435	黑	SWP

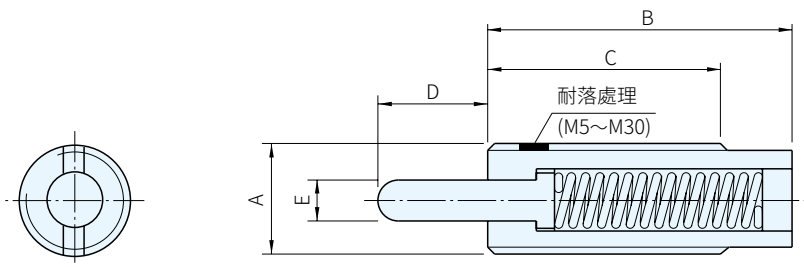

品號	A	B	C	D	E	荷重(N)	專用扳手	庫存
						最小~最大		
SP-03H	M3×0.5	10	10	1.5	1.0	0.5~3	一字型起子	•
SP-04H	M4×0.7	12	12	2.0	1.6	2~10	一字型起子	•
SP-05H	M5×0.8	20	20	3.0	2.0	4~20	PW-05	•
SP-06H	M6×1	25	25	3.0	2.5	8~30	PW-06	•
SP-08H	M8×1.25	25	25	4.0	3.1	8~30	PW-08	•
SP-10H	M10×1.5	30	30	5.0	3.8	10~50	PW-10	•
SP-12H	M12×1.75	30	30	5.0	5.5	10~50	PW-12	•
SP-12-10H	M12×1.75	43	35	10.0	5.5	7~40		•
SP-16-10HS	M16×2	50	35	10.0	8.0	20~100	PW-16	•
SP-16-10H	M16×2	60	35	10.0	8.0	27~80		•
SP-16-15H	M16×2	60	35	15.0	8.0	15~80		•
SP-16-20H	M16×2	85	35	20.0	8.0	17~80		•
SP-16-30H	M16×2	125	35	30.0	8.0	20~80		•
SP-16-40H	M16×2	125	35	40.0	8.0	20~80		•
SP-16-50H	M16×2	155	35	50.0	8.0	30~100		•
SP-16-60H	M16×2	155	35	60.0	8.0	20~80		•
SP-16-70H	M16×2	200	35	70.0	8.0	30~150		•
SP-16-80H	M16×2	200	35	80.0	8.0	30~150		•
SP-24-15H	M24×3	60	45	15.0	10.0	40~200	PW-24	•
SP-30-20H	M30×3.5	70	45	20.0	15.0	50~300	PW-30	•

WA. 注意

- 專用扳手請參閱PW
- 1N=0.101972kgf



PS. 備註

- 經濟型產品

訂貨： 交期： 天

SP-03H

EX. 使用例

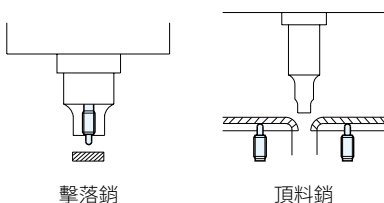

防鬆扭矩檢驗規範 (IFI 524)

螺絲規格	首次鎖附(N.m)	首次拆卸(N.m)	第五次拆卸(N.m)
	Max	Min	Min
M1.6×0.35	0.10	0.01	0.004
M2×0.4	0.20	0.02	0.01
M2.5×0.45	0.40	0.05	0.03
M3×0.5	0.60	0.14	0.06
M3.5×1	0.90	0.22	0.11
M4×0.7	1.20	0.26	0.16
M5×0.8	2.3	0.36	0.23
M6×1	3.0	0.45	0.30
M8×1.25	10	0.90	0.58
M10×1.5	14	1.80	1.10
M12×1.75	21	2.6	1.5
M14×2	30	3.6	2.3
M16×2	40	5.0	3.4
M20×2.5	60	8.0	5.5
M24×3	90	13	8.5
M30×3.5	120	19	13
M36×4	150	28	18