







Type	本體		把手		彈簧
	材質	處理	材質	顏色	材質
C、CK	SUS316	銷頭鍍鎳	PA	消光黑	SUS316Ti
CN、CKN			SUS316	-	

Type C

Type CK

Type CN

Type CKN

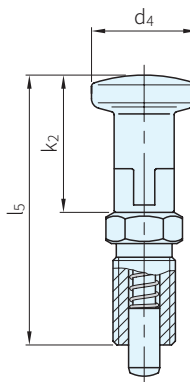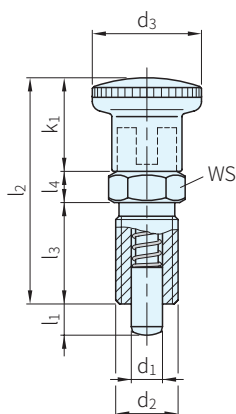

型號	d1 -0.02 -0.05	l1	Type	材質	d2	d3	d4	k1	k2	l2	l3	l4	l5	WS	荷重(N)≈		庫存
															初壓	終壓	
SGR818	4	4	C (PA把手, 無螺帽)	A4 (SUS316)	M8×1	16	16	14	20	35	16	5	41	10	3.5	11	△
	4	6			M8×1	16	16	14	22	35	16	5	43	10	3	11	△
	5	5			M10×1	19	18	16	24	40	18	6	48	12	3	12	△
	5	8	CK (PA把手, 有螺帽)		M10×1	19	18	16	27	40	18	6	51	12	3	14	△
	6	6			M12×1.5	23	22	20	29	48	22	6	57	14	4.5	16	△
	6	9	CN (SUS316把手, 無螺帽)		M12×1.5	23	22	20	32	48	22	6	60	14	4	20	△
	8	8			M16×1.5	28	27	24	35	58	26	8	69	17	6	23	△
	8	12	CKN (SUS316把手, 有螺帽)		M16×1.5	28	27	24	39	58	26	8	73	17	7	26	△
	10	12			M16×1.5	28	27	24	41	58	26	8	75	17	7.5	32	△
	12	15			M20×1.5	33	32	28.5	46.5	71.5	33	10	89.5	22	9	32	△

Sp. 特長

- 材質SUS316，可應用於高腐蝕性的環境之中
- 把手上拉後旋轉90°，銷子可維持內縮狀態

訂貨： - - - - 交期：天

SGR818 - 4 - 4 - C - A4

Wa. 注意

- 建議d1配合孔公差H7