

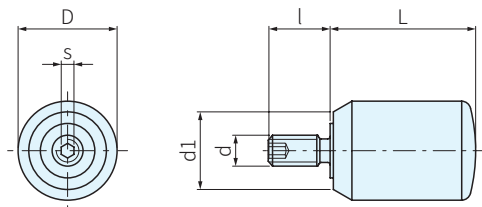
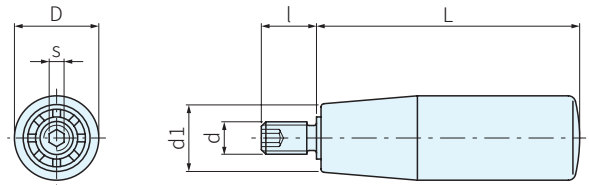


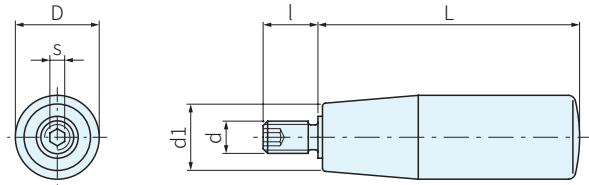

Type	把手		入子	
	材質	顏色	材質	處理
I.281+X	PF(電木)	黑	鋼	鍍鉻
I.301+X (L=28)	PA			鍍鉻
I.301+X	PF(電木)		SUS303	-
I.601+X	PP			鋼
I.701+X	PA			

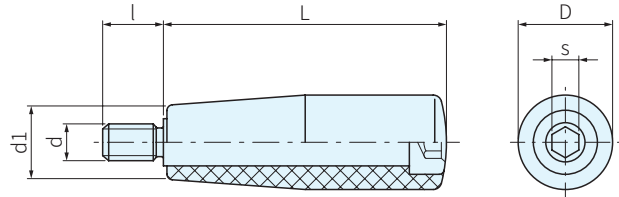

品號	備註	D	L	d 6g	d1	l	s	質量 g	庫存
I.281+X-010	PF把手，鋼入子	18	40	M6	15	13	4	28	·
I.281+X-020		21	50	M8	17	15	5	52	·
I.281+X-030		23	65	M8	19	17	6	86	·
I.281+X-032		23	65	M10	19	17	6	90	△
I.281+X-040		26	80	M10	21	18	6	132	·
I.281+X-050		28	90	M10	22	18	8	170	·
I.281+X-060		31	102	M12	25	20	8	245	·
I.281+X-062		31	102	M14	25	20	8	248	△
I.301+X-010	PA把手，鋼入子	14	28	M6	11	10	3	13	·
I.301+X-012	PF把手，鋼入子	18	40	M6	15	13	3	27	·
I.301+X-014		21	50	M6	17	13	3	37	·
I.301+X-016		21	50	M8	17	13	4	38	·
I.301+X-018		23	65	M8	19	15	4	75	·
I.301+X-020		23	65	M10	19	17	5	77	·
I.301+X-022		26	80	M8	21	15	4	95	·
I.301+X-024		26	80	M10	21	17	5	98	·
I.301+X-026		28	90	M10	22	17	5	118	·
I.301+X-027		31	102	M10	25	17	5	143	△
I.301+X-028		31	102	M12	25	20	5	160	·
I.301+X-030		29	116	M10	23	17	5	143	·
I.601+X-010	PP把手，鋼入子	18	40	M6	15	13	3	25	·
I.601+X-020		21	50	M6	17	13	3	35	·
I.601+X-022		22	56	M6	18	13	3	40	△
I.601+X-030		23	65	M8	19	15	4	68	·
I.601+X-032		23	65	M10	19	17	5	70	△
I.601+X-040		26	80	M8	21	15	4	75	·
I.601+X-050		26	80	M10	21	17	5	78	·
I.601+X-060		28	90	M10	22	17	5	85	·
I.601+X-062		28	90	M12	22	20	5	100	△
I.601+X-011		PP把手，不銹鋼入子	18	40	M6	15	13	3	25
I.601+X-021	21		50	M6	17	13	3	35	·
I.601+X-031	23		65	M8	19	15	4	68	·
I.601+X-051	26		80	M10	21	17	5	78	·
I.601+X-061	28		90	M10	22	17	5	85	·
I.701+X-008	PA把手，鋼入子	13.5	20	M4	11	8	2	7	△
I.701+X-010		13.5	20	M5	11	10	2.5	10	·
I.701+X-020		16	23	M5	12.5	10	2.5	12	·

WA) 注意

- I.281+X把手頭端為內六角
- I.301+X、I.601+X、I.701+X螺紋端為內六角
- 使用溫度：
I.281+X：MAX.110°C，MIN.-20°C
I.301+X：MAX.110°C，MIN.-20°C
I.601+X：MAX.80°C，MIN.0°C
I.701+X：MAX.90°C，MIN.-20°C

訂貨： 交期： 天 ·
I.281+X-010 天 △

PS) 備註

- 手輪組裝件(參考手輪單元)：
I.281+X：塑膠手輪VL.140+I、不銹鋼手輪SGR228
I.301+X：塑膠手輪VDN.FP+I、搖動手輪ME
I.601+X：搖動手輪MT-AS、MT
I.701+X：塑膠手輪MBT+I