




Type	材質	處理	連續使用溫度
TKJ	鋼	鍍線	-
MKJ	SUS	-	-
SRAB	RENY	-	105°C
SCFP	PEEK	-	260°C
SSPW	PPS	-	200°C

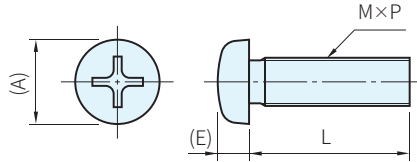

M×P	A	E
1.2×0.25	1.8	0.5
1.4×0.3	2	
1.6×0.35	2.3	
1.7×0.35	2.5	
2×0.4	3.5	
2.6×0.45	4.5	1.7
3×0.5	5.5	2
4×0.7	7	2.6
5×0.8	9	3.3
6×1	10.5	3.9

此表為參考尺寸，
實際尺寸依實體為主

品號		庫存				
		鋼	SUS	RENY	PEEK	PPS
Type	M - L	TKJ	MKJ	SRAB	SCFP	SSPW
TKJ (鋼)	1.2 - 2.5				•	
	4				•	
	1.4 - 2.5	•			•	
	4		•		•	
	1.6 - 2.5	•			•	
	1.7 - 4	•	•	△	•	
	2 - 4	•	•	△	•	△
	5	•	•	△	•	△
	6	•	•	△	•	△
	8	•	•	△	•	△
MKJ (SUS)	10	•	•	△	•	△
	12	•	•	△	•	△
	2.6 - 6	•	•	•	•	•
SRAB (RENY)	8	•	•	•	•	•
	10	•	•	•	•	•
	12	•	•	•	•	•
SCFP (PEEK)	15	•	•	•	•	•
	20	•	•	△	•	•
	4 - 5	•	△	△		
SSPW (PPS)	6	•	•	•	•	•
	8	•	•	•	•	•
	10	•	•	•	•	•
	12	•	•	•	•	•
	15	•	•	•	•	•
	20	•	•	•	•	•
	5 - 8	•	•	•	•	•
	10	•	•	•	•	•
	12	•	•	•	•	•
	15	•	•	•	•	•
20	•	•	•	•	•	
	6 - 10	•	•	•	•	•
	12	•	•	•	•	•
	15	•	•	•	•	•
	20	•	•	•	•	•

PS 備註

- 請參考技術資料塑膠—相關表單，或掃描QR-CODE
- 表中以外長度歡迎洽詢



訂貨： 交期： 天 · 天 △