




NCD

NCD-CR

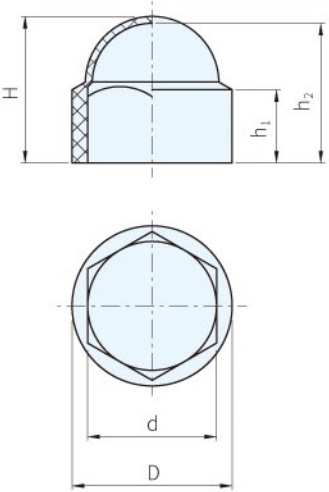

TYPE	材質	處理
NCD	PE	RAL 9005黑色,亞光飾面
NCD-CR	PE	鍍鉻,亞光飾面

TYPE		D	d	H	h ₁	h ₂	螺母或螺栓螺紋	六角扳手*	質量	庫 存
NCD	NCD-CR									
NCD-010	NCD-CR-010	9	6.9	7.8	3.5	6.5	M 4	7	1	•
NCD-012	NCD-CR-012	10.9	7.9	10.4	6	9.3	M 5	8		•
NCD-014	NCD-CR-014	12.9	9.8	12.4	7	11.4	M 6	10		•
NCD-016	NCD-CR-016	16.3	12.8	15	8.5	14	M 8	13		•
NCD-018	NCD-CR-018	20.3	16.7	19.1	9	17.2	M 10	17	2	•
NCD-020	NCD-CR-020	22.6	18.7	20	10.1	17.9	M 12	19		•
NCD-022	NCD-CR-022	27	21.7	23.5	11.5	22	M 14	22		•
NCD-024	NCD-CR-024	29.2	23.7	26	14.6	24	M 16	24		•
NCD-026	NCD-CR-026	33.1	26.8	29.1	15.3	26.9	M 18	27	6	•
NCD-028	NCD-CR-028	35.7	29.8	32.8	17.9	30.2	M 20	30	7	•
NCD-030	NCD-CR-030	39.3	31.8	35.5	19	33.2	M 22	32	11	•
NCD-032	NCD-CR-032	44	35.8	40	20	37.6	M 24	36	12	•
NCD-034	NCD-CR-034	49.5	40.8	46.5	23	44.5	M 27	41	15	•
NCD-036	NCD-CR-036	55.1	45.8	50.2	24.5	47.7	M 30	46	22	•

PS. 備註

- * 產品只適用於螺母和螺栓六角扳手如表所示

EX. 使用例

- 螺母或螺栓上的聯軸器可以用手或木槌製作

訂貨： TYPE 交期： 1 天
NCD-010

Te. 技術資料

- 使用溫度max.80°C

