



RoHS

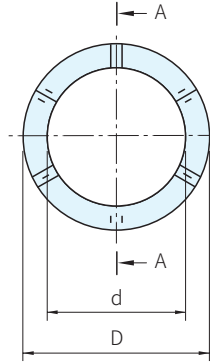

A-A : 剖面


材質	硬度
鋼	HRC40~50

品號		軸承 外徑	D	d	H	t	適用軸承				數量/袋	庫存		
Type	NO.													
BWW CAP-BWW (袋裝)	624	13	12.4	8.4	1.8~2.1	0.20		624	633		695	2000	•	
	625	16	15.5	10.95	1.5~1.9			625	634				•	
	607	19	18.0	12.7	2.5~3.0	0.30		607	626	635	6800		•	
	626							607	626	635	6800		•	
	608	22	20.9	14.7	2.5~3.0	0.30		608	627	636		6900	•	
	627							608	627	636		6900	•	
	629	26	24.8	19.6	3.2~4.1	0.30		6000	629	637	6803		•	
	6000	26	24.8	19.6				6000					•	
	6001	28	26.8	21.0	3.0~3.6	0.30		6001		638		6902	•	
	6200	30	29.0	21.2	3.0~3.6				6200	639		6903	•	
	6201	32	31.0	23.2	3.3~3.9	0.30		6002	6201		6804		•	
	6202	35	33.9	26.0	3.5~4.2				6003	6202	6300		•	
	6301	37	36.0	28.7	4.0~4.8	0.30				6301	6805	6904	•	
	6203	40	38.6	30.4	4.4~5.1				6203				•	
	6302	42	40.5	31.8	4.8~5.6	0.30				6302	6806	6905	•	
	6204	47	45.5	34.2	5.0~5.8				6004		6302	6806	6905	•
	6303											6005	6204	6303
	6205	52	50.2	40.8	5.3~6.2	0.40			6204	6303	6807	6906	•	
	6304												6205	6304
	6206	62	60.3	47.5	6.0~6.8	0.50		6007	6206	6305		6908	•	
	6305												6007	6206
	6207	72	69.8	53.5	7.0~8.0	0.50			6207	6306	6811	6910	•	
	6306													6207
	6307	80	77.9	60.4	6.6~8.7	0.50		6010	6208	6307		6911	•	
	6208													
	6209	85	82.6	69.2	7.5~8.5	0.50			6209		6813	6912	•	
	6210												6011	6210
	6308	90	88.0	68.8	6.4~7.8	0.56			6011	6210	6308	6814	6913	•
	6211												6013	6211
	6309	100	98.0	83.4	6.9~7.7	0.90							•	
	6212	110	108.0	85.3	8.0~8.8				6014	6212	6310	6817	6916	•
	6310							8.0~8.8						
	6213	120	117.4	91.6	8.5~9.5	1.00			6213	6311		6917	•	
6311													6213	6311
6215	130	127.4	107.4	10.0~12.0	0.80		6017	6215	6312		6919	•		
6312												6017	6215	6312
6216	140	137.4	111.4	10.0~12.0	0.80		6018	6216	6313	6822	6920	•		
6313												6018	6216	6313

PS. 備註

· 目錄以外尺寸歡迎洽詢

EX. 使用例



訂貨： Type - NO. 交期： 1 天 ·

BWW - 624

CAP-BWW - 624

4 天 袋裝