

L · W	公差
10~400	±0.5
401~800	±0.8
801~900	±1.2

Type	材質	T												
		0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5	0.6	0.7	0.8	1
FPF	鐵(T0.1~3: ≈SPCC、T3.2~6: SPHC)	-	±0.03	±0.03	±0.03	±0.04	±0.04	-	±0.05	±0.05	±0.06	-	±0.06	±0.08
FPS	不銹鋼(SUS304)	±0.005	±0.008	±0.008	±0.01	±0.015	±0.015	±0.015	±0.02	±0.02	±0.025	±0.03	±0.03	±0.035
FPB	黃銅(C2680或C2801)	±0.005	±0.02	±0.02	±0.02	±0.02	±0.03	-	±0.04	±0.04	±0.04	±0.04	±0.04	±0.05
FPC	銅(T0.1: C1020、T0.2~1: C1100)	-	±0.02	±0.02	±0.02	±0.02	±0.03	-	±0.04	±0.04	±0.04	±0.04	±0.04	±0.05
FPA	鋁(T0.1~0.15: 1N30、T0.2~3: A1050)	-	±0.03	±0.03	±0.03	-	±0.04	-	±0.04	±0.04	±0.04	-	±0.05	±0.05

Type	材質	T												
		1.2	1.5	1.6	2	2.3	2.5	2.6	3	3.2	4	4.5	5	6
FPF	鐵(T0.1~2.6: ≈SPCC、T3.2~6: SPHC)	±0.08	-	±0.12	±0.14	±0.14	-	±0.21	±0.23	±0.23	±0.26	±0.26	±0.28	±0.3
FPS	不銹鋼(SUS304)	±0.1	±0.12	-	±0.17	-	±0.22	-	±0.22	-	±0.35	-	±0.4	±0.5
FPB	黃銅(C2680或C2801)	±0.05	±0.06	-	±0.06	-	-	-	-	-	-	-	-	-
FPC	銅(T0.1: C1020、T0.2~1: C1100)	-	-	-	-	-	-	-	-	-	-	-	-	-
FPA	鋁(T0.1~0.15: 1N30、T0.2~3: A1050)	±0.06	±0.06	-	±0.08	-	-	-	±0.11	-	-	-	-	-

Type	指定單位：1mm		板厚 T*	庫存				
	短邊	長邊		鐵	SUS	黃銅	銅	鋁
				FPF	FPS	FPB	FPC	FPA
FPF (鐵)	10~100	10~100	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPS (SUS)	10~100	101~200	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPB (黃銅)	10~100	101~200	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPC (銅)	10~100	101~200	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPA (鋁)	20~100	201~300	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPA (鋁)	20~100	201~300	5、6	△	△			

PS) 備註

· *規格請參照厚度公差表

Type	指定單位：1mm		板厚 T*	庫存					
	短邊	長邊		鐵	SUS	黃銅	銅	鋁	
				FPF	FPS	FPB	FPC	FPA	
FPF (鐵) FPS (SUS) FPB (黃銅) FPC (銅) FPA (鋁)	20~100	301~400	0.05		△	△			
			0.1~0.5	△	△	△	△	△	
			0.6~1	△	△	△	△	△	
			1.2~2.3	△	△	△		△	
			2.5~3.2	△	△			△	
			4・4.5	△	△				
		5・6	△	△					
		401~500	0.05		△	△			
			0.1~0.5	△	△	△	△	△	
			0.6~1	△	△	△	△	△	
			1.2~2.3	△	△	△		△	
			2.5~3.2	△	△			△	
	4・4.5		△	△					
	30~100	501~600	0.05		△	△			
			0.1~0.5	△	△	△	△	△	
			0.6~1	△	△	△	△	△	
			1.2~2.3	△	△	△		△	
			2.5~3.2	△	△			△	
			4・4.5	△	△				
			5・6	△	△				
			601~700	0.05		△	△		
				0.1~0.5	△	△	△	△	△
				0.6~1	△	△	△	△	△
				1.2~2.3	△	△	△		△
				2.5~3.2	△	△			△
		4・4.5		△	△				
		701~800	0.05		△	△			
			0.1~0.5	△	△	△	△	△	
			0.6~1	△	△	△	△	△	
			1.2~2.3	△	△	△		△	
			2.5~3.2	△	△			△	
			4・4.5	△	△				
			5・6	△	△				
			801~900	0.05		△	△		
				0.1~0.5	△	△	△	△	△
				0.6~1	△	△	△	△	△
1.2~2.3				△	△	△		△	
2.5~3.2	△			△			△		
4・4.5	△	△							
5・6	△	△							

PS. 備註

· *規格請參照厚度公差表



訂貨：Type - W - L - T - 處理 交期：20 天

FPS - 50 - 600 - 0.1

FPS - 50 - 600 - 0.1 - LM

處理

- 雷射刻字 …品號末尾 LM
- 蓋印 …品號末尾 S
- 黏著劑塗布 …品號末尾 N
- 染黑 …品號末尾 C

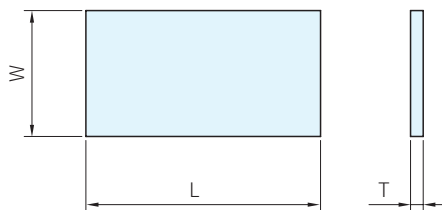

L · W	公差
10~400	±0.5
401~800	±0.8
801~900	±1.2

Type	材質	T												
		0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5	0.6	0.7	0.8	1
FPF	鐵(T0.1~3: ≈SPCC、T3.2~6: SPHC)	-	±0.03	±0.03	±0.03	±0.04	±0.04	-	±0.05	±0.05	±0.06	-	±0.06	±0.08
FPS	不銹鋼(SUS304)	±0.005	±0.008	±0.008	±0.01	±0.015	±0.015	±0.015	±0.02	±0.02	±0.025	±0.03	±0.03	±0.035
FPB	黃銅(C2680或C2801)	±0.005	±0.02	±0.02	±0.02	±0.02	±0.03	-	±0.04	±0.04	±0.04	±0.04	±0.04	±0.05
FPC	銅(T0.1: C1020、T0.2~1: C1100)	-	±0.02	±0.02	±0.02	±0.02	±0.03	-	±0.04	±0.04	±0.04	±0.04	±0.04	±0.05
FPA	鋁(T0.1~0.15: 1N30、T0.2~3: A1050)	-	±0.03	±0.03	±0.03	-	±0.04	-	±0.04	±0.04	±0.04	-	±0.05	±0.05

Type	材質	T												
		1.2	1.5	1.6	2	2.3	2.5	2.6	3	3.2	4	4.5	5	6
FPF	鐵(T0.1~2.6: ≈SPCC、T3.2~6: SPHC)	±0.08	-	±0.12	±0.14	±0.14	-	±0.21	±0.23	±0.23	±0.26	±0.26	±0.28	±0.3
FPS	不銹鋼(SUS304)	±0.1	±0.12	-	±0.17	-	±0.22	-	±0.22	-	±0.35	-	±0.4	±0.5
FPB	黃銅(C2680或C2801)	±0.05	±0.06	-	±0.06	-	-	-	-	-	-	-	-	-
FPC	銅(T0.1: C1020、T0.2~1: C1100)	-	-	-	-	-	-	-	-	-	-	-	-	-
FPA	鋁(T0.1~0.15: 1N30、T0.2~3: A1050)	±0.06	±0.06	-	±0.08	-	-	-	±0.11	-	-	-	-	-

Type	指定單位：1mm		板厚 T*	庫存				
	短邊	長邊		鐵	SUS	黃銅	銅	鋁
				FPF	FPS	FPB	FPC	FPA
FPF (鐵)	101~200	101~200	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
5、6		△	△					
FPS (SUS)		201~300	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPB (黃銅)		301~400	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
	4、4.5		△	△				
FPC (銅)		0.05		△	△			
		0.1~0.5	△	△	△	△	△	
		0.6~1	△	△	△	△	△	
		1.2~2.3	△	△	△		△	
		2.5~3.2	△	△			△	
		4、4.5	△	△				
FPA (鋁)		0.05		△	△			
		0.1~0.5	△	△	△	△	△	
		0.6~1	△	△	△	△	△	
		1.2~2.3	△	△	△		△	
		2.5~3.2	△	△			△	
		4、4.5	△	△				
5、6	△	△						

PS) 備註

· *規格請參照厚度公差表

Type	指定單位：1mm		板厚 T*	庫存				
	短邊	長邊		鐵	SUS	黃銅	銅	鋁
				FPF	FPS	FPB	FPC	FPA
FPF (鐵) FPS (SUS) FPB (黃銅) FPC (銅) FPA (鋁)	101~200	401~500	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4 · 4.5	△	△			
			5 · 6	△	△			
		501~600	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4 · 4.5	△	△			
		601~700	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4 · 4.5	△	△			
		701~800	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4 · 4.5	△	△			
		801~900	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
1.2~2.3	△		△	△		△		
2.5~3.2	△		△			△		
4 · 4.5	△		△					
5 · 6	△	△						

PS. 備註

· *規格請參照厚度公差表



訂貨：Type - W - L - T - 處理 交期：20 天

FPS - 150 - 600 - 0.1

FPS - 150 - 600 - 0.1 - LM

處理

- 雷射刻字 ...品號末尾 LM
- 蓋印 ...品號末尾 S
- 黏著劑塗布...品號末尾 N
- 染黑 ...品號末尾 C

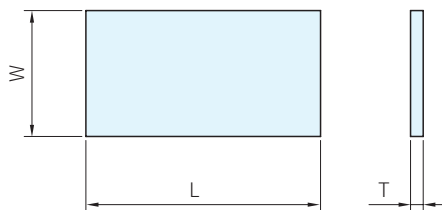

L · W	公差
10~400	±0.5
401~800	±0.8
801~900	±1.2

Type	材質	T												
		0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.5	0.6	0.7	0.8	1
FPF	鐵(T0.1~3: ≈SPCC、T3.2~6: SPHC)	-	±0.03	±0.03	±0.03	±0.04	±0.04	-	±0.05	±0.05	±0.06	-	±0.06	±0.08
FPS	不銹鋼(SUS304)	±0.005	±0.008	±0.008	±0.01	±0.015	±0.015	±0.015	±0.02	±0.02	±0.025	±0.03	±0.03	±0.035
FPB	黃銅(C2680或C2801)	±0.005	±0.02	±0.02	±0.02	±0.02	±0.03	-	±0.04	±0.04	±0.04	±0.04	±0.04	±0.05
FPC	銅(T0.1: C1020、T0.2~1: C1100)	-	±0.02	±0.02	±0.02	±0.02	±0.03	-	±0.04	±0.04	±0.04	±0.04	±0.04	±0.05
FPA	鋁(T0.1~0.15: 1N30、T0.2~3: A1050)	-	±0.03	±0.03	±0.03	-	±0.04	-	±0.04	±0.04	±0.04	-	±0.05	±0.05

Type	材質	T												
		1.2	1.5	1.6	2	2.3	2.5	2.6	3	3.2	4	4.5	5	6
FPF	鐵(T0.1~2.6: ≈SPCC、T3.2~6: SPHC)	±0.08	-	±0.12	±0.14	±0.14	-	±0.21	±0.23	±0.23	±0.26	±0.26	±0.28	±0.3
FPS	不銹鋼(SUS304)	±0.1	±0.12	-	±0.17	-	±0.22	-	±0.22	-	±0.35	-	±0.4	±0.5
FPB	黃銅(C2680或C2801)	±0.05	±0.06	-	±0.06	-	-	-	-	-	-	-	-	-
FPC	銅(T0.1: C1020、T0.2~1: C1100)	-	-	-	-	-	-	-	-	-	-	-	-	-
FPA	鋁(T0.1~0.15: 1N30、T0.2~3: A1050)	±0.06	±0.06	-	±0.08	-	-	-	±0.11	-	-	-	-	-

Type	指定單位：1mm		板厚 T*	庫存				
	短邊	長邊		鐵	SUS	黃銅	銅	鋁
				FPF	FPS	FPB	FPC	FPA
FPF (鐵)	201~300	201~300	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPS (SUS)		301~400	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPB (黃銅)	401~500	401~500	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPC (銅)	5、6	5、6	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
FPA (鋁)	5、6	5、6	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			

PS) 備註

· *規格請參照厚度公差表

Type	指定單位：1mm		板厚 T*	庫存				
	短邊	長邊		鐵	SUS	黃銅	銅	鋁
				FPF	FPS	FPB	FPC	FPA
FPF (鐵)	201~300	501~600	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
			4、4.5	△	△			
			5、6	△	△			
FPS (SUS)		601~700	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
FPB (黃銅)		701~800	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
			2.5~3.2	△	△			△
FPC (銅)		801~900	0.05		△	△		
			0.1~0.5	△	△	△	△	△
			0.6~1	△	△	△	△	△
			1.2~2.3	△	△	△		△
	2.5~3.2		△	△			△	
FPA (鋁)	801~900	4、4.5	△	△				
		5、6	△	△				
		5、6	△	△				

PS. 備註

· *規格請參照厚度公差表

訂貨：Type - W - L - T - 處理 交期：20 天

FPS - 250 - 500 - 0.1

FPS - 250 - 500 - 0.1 - LM

處理

- 雷射刻字 ...品號末尾 LM
- 蓋印 ...品號末尾 S
- 黏著劑塗布...品號末尾 N
- 染黑 ...品號末尾 C