

(RoHS)



材質	處理
鋼	染黑
SUS	-

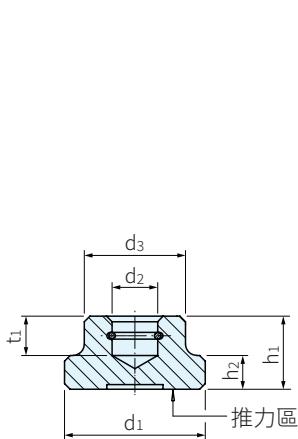


圖 1



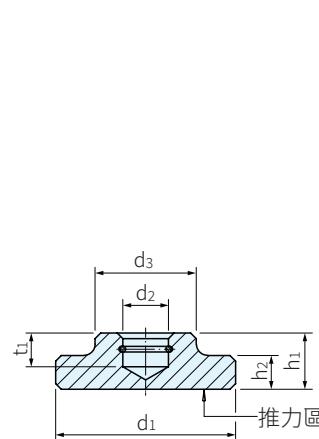



圖 2

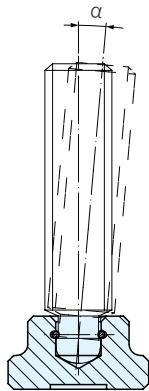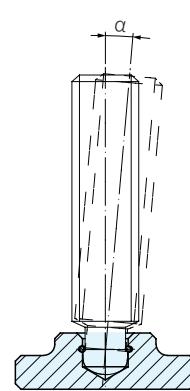

品號	備註	d ₁	d ₂ H12	d ₃	h ₁	h ₂	t ₁	適用螺絲 DIN 6332	α min	質量 g	庫存
22560.0012	圖1 鋼	12	4.6	10	7	2.5	4	M6	7°	4.3	•
22560.0016		16	6.1	12	9	4	5	M8	4°	9.4	•
22560.0020		20	8.1	15	11	5	6	M10	3°	18	•
22560.0025		25	8.1	18	13	6	7	M12	3°	33	•
22560.0032		32	12.1	22	15	7	7.5	M16	5°	59	•
22560.0040		40	15.6	28	16	9	8	M20	4°	105	•
22560.0112	圖1 不銹鋼	12	4.6	10	7	2.5	4	M6	7°	4.2	•
22560.0116		16	6.1	12	9	4	5	M8	4°	39	•
22560.0120		20	8.1	15	11	5	6	M10	3°	18	•
22560.0125		25	8.1	18	13	6	7	M12	3°	33	•
22560.0132		32	12.1	22	15	7	7.5	M16	5°	61	•
22560.0140		40	15.6	28	16	9	8	M20	4°	105	•
22560.0425	圖2 鋼	25	6.1	12	8	4	4.5	M8	4°	18	•
22560.0432		32	8.1	18	10	6	6	M10/M12	3°	43	•
22560.0440		40	12.1	22	12	7	7	M16	5°	75	•
22560.1425	圖2 不銹鋼	25	6.1	12	8	4	4.5	M8	4°	18	•
22560.1432		32	8.1	18	10	6	6	M10/M12	3°	43	•
22560.1440		40	12.1	22	12	7	7	M16	5°	78	•

Wa 注意

- 本產品和22540結合使用
- 組裝時將止推螺栓傾斜，並壓入
- 安裝孔內有扣環

Ex. 使用例訂貨 : 品號 交期 : 1 天

22560.0012