


本體			華司·螺絲	
材質	硬度	顏色	材質	處理
NR(橡膠)	55±5 Shore A	黑	鋼	鍍鋅

品號	D	L	d	l	定數 (N/mm)	最大壓縮量 (mm)	最大荷重 (N)	質量 (g)	庫存
FVD-412700	8	8	M3	6	28	2	55	3	•
FVD-412701	10	10	M4	10	35	2.5	88	2	•
FVD-412703		15			25	3.75	92	3	•
FVD-412706	10	84			2	168	4	•	
FVD-412709	15	69			3.75	259	5	•	
FVD-412711	15	20	M6	18	45	5	223	7	•
FVD-412716		30			34	7.5	258	9	•
FVD-412721		10			258	2.5	645	15	•
FVD-412741	20	15			125	3.75	468	10	•
FVD-412746		20			73	5	367	13	•
FVD-412751	25	30			56	7.5	420	23	•
FVD-412756		15	213	3.75	797	18	•		
FVD-412761		17	196	4.25	833	20	•		
FVD-412766		20	116	5	581		•		
FVD-412771	30	30	M8	20	79	7.5	591	25	•
FVD-412776		15			273	3.75	1023	30	•
FVD-412781	17	300			4.25	1275	31	•	
FVD-412801	30	20			203	5	1014	35	•
FVD-412811		25			164	6.25	1026	38	•
FVD-412821	40	30			103	7.5	776	43	•
FVD-412831		20	500	5	2500	55	•		
FVD-412836		25	266	6.25	1660	60	•		
FVD-412841		30	197	7.5	1480	73	•		
FVD-412861	50	40	M10	28	140	10	1403	83	•
FVD-412881		20			692	5	3460	90	•
FVD-412901	30	366			7.5	2520	118	•	
FVD-412921	40	276			10	2760	140	•	
FVD-412931	60	20			770	5	2850	219	•
FVD-412936		40			354	10	3540	195	•
FVD-412941	70	55	628	6280	265		•		
FVD-412951		420	13.75	5770	357	•			
FVD-412961	75	25	M12	37	1546	6.25	9660	223	•
FVD-412971		40			668	10	6680	310	•
FVD-412981		50			446	12.5	5570	340	•
FVD-413001	100	40	M16	41	1211	10	12110	570	•
FVD-413011		50			1123	12.5	14040	655	•
FVD-413021		60			863	15	12950	830	•

Sp 特長

- 用在減震和降低機件的晃動及噪音

Ex 使用例

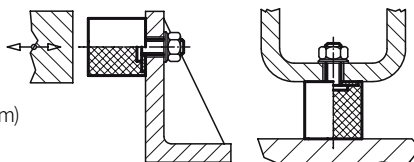

訂貨： 交期：

FVD-412700

Ps 備註

- 1N=0.101972kgf
- 荷重 (N) = 定數 (N/mm) × 壓縮量 (mm)
- 40ShoreA 和 70ShoreA 可訂製