


RoHS SUS




Type		材質	硬度 HRC
標準型	內螺牙型		
22630.52	22630.55	SUJ2	58~62
22630.53	22630.56	SUS304	-
22630.54	22630.57	SUS420	50~55

公差選擇

A或B	B	A
	n6	g6
2.00~	+0.010	-0.002
3.00	+0.004	-0.008
3.01~	+0.016	-0.004
6.00	+0.008	-0.012
6.01~	+0.019	-0.005
10.00	+0.010	-0.014
10.01~	+0.023	-0.006
18.00	+0.012	-0.017
18.01~	+0.028	-0.007
30.00	+0.015	-0.020

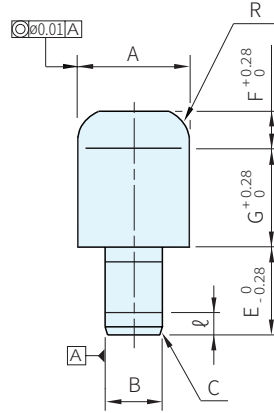

標準型

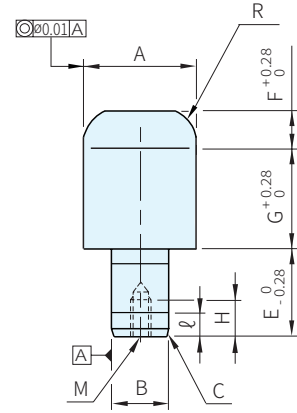

內螺牙型

標準型 Type	B n6	A g6	B	A 選擇	E 選擇	G 選擇	F 選擇	R 選擇	ℓ	C
				單位0.01mm	單位1mm	單位0.5mm	單位0.5mm			
22630.52 22630.53 22630.54	n6	g6	2	2.00~ 4.00	3~10	1.5~10.0	1.0~20.0	5 10 15 20 25 30 35 40	0	0.5
			3	3.00~ 6.00	4~12	1.5~10.0				
			4	4.00~ 7.00	4~12	1.5~10.0				
			5	5.00~ 8.00	4~12	1.5~10.0				
			6	6.00~10.00	4~12	2.5~12.0			1.2	0.9
			8	8.00~13.00	8~16	2.5~14.0				
			10	10.00~15.00	8~16	2.5~16.0			2.2	1.2
			12	12.00~16.00	10~20	2.5~18.0				
			13	13.00~18.00	12~20	2.5~20.0			1.5	1.5
			16	16.00~25.00	12~25	2.5~20.0				
20	20.00~30.00	16~32	2.5~20.0	3.5	2.5					

內螺牙型 Type	B n6	A g6	B	A 選擇	E 選擇	G 選擇	F 選擇	R 選擇	M 粗螺紋	H	ℓ	C	
				單位0.01mm	單位1mm	單位0.5mm	單位0.5mm						
22630.55 22630.56 22630.57	n6	g6	6	6.00~10.00	6~14	2.5~12.0	1.0~20.0	5 10 15 20 25 30 35 40	5	M3	5	1.2	0.9
			8	8.00~13.00	8~18	2.5~14.0				M5	8	1.2	
			10	10.00~15.00	10~20	2.5~16.0			M5	8	2.2	1.5	
			12	12.00~16.00	12~24	2.5~18.0							
			13	13.00~18.00	12~26	2.5~20.0			M8	10	3.5	2.5	
			16	16.00~25.00	16~34	2.5~20.0							
			20	20.00~30.00	20~40	2.5~20.0			M8	12			

Wa 注意

- 請確認下孔深度，孔可能會貫穿
- 特殊尺寸、公差、歡迎和本公司洽詢
- 本產品尺寸公差符合DIN6321

訂貨： TYPE - B - A - E - G - F - R
22630.52 - 10 - A14.00 - E10 - G4.0 - F6.0 - R20

交期： 10 天

F,R尺寸指定範圍詳細尺寸表

A 指定單位0.01mm	F 指定單位0.5mm	R 選擇							
2.00~ 4.00	1.0~ 2.0	5	10						
4.01~ 8.00	2.5~ 4.0		10	15					
8.01~12.00	4.5~ 7.0		10	15	20				
12.01~16.00	5.0~10.0			15	20	25			
16.01~20.00	5.0~15.0				20	25	30		
20.01~25.00	5.0~15.0					25	30	35	
25.01~30.00	5.0~20.0						30	35	40