




Type	材質	硬度
SGR179.A	SUJ2	58~62HRC
SGR179.B	SUS304	-
SGR179.C	SUS420	45~50HRC

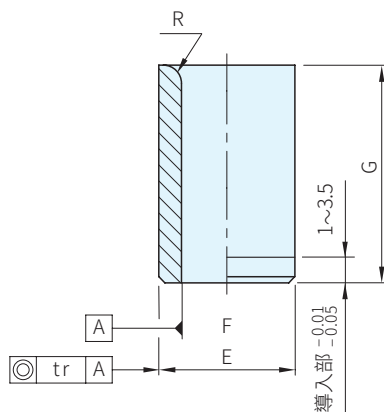

Type	E		F ^{+0.01} ₊₀	G ⁰ _{-0.28}	R	庫存		
	n6		指定單位 0.01mm	指定單位 0.1mm		SGR179.A	SGR179.B	SGR179.C
SGR179.A SGR179.B SGR179.C	5	+0.016	2.00~ 2.50	5.0~ 6.0	0.7	△	△	△
	6	+0.008	2.00~ 3.00	5.0~ 7.0				
	7	+0.019	2.00~ 3.50	5.0~ 8.0	0.9			
	8		3.00~ 4.50	5.0~13.0				
	10	+0.010	4.00~ 6.50	5.0~20.0	2.0			
	12	+0.023	6.00~ 8.50	10.0~40.0				
	15		8.00~10.50					
	18	+0.012	10.00~12.50					
26	+0.028	15.00~16.50						
	+0.015							

Ps. 備註

- 本產品尺寸公差符合DIN179
- E公差n6可配合孔公差H7成壓配組立
- E外徑亦可使用LOCTITE638或LOCTITE630黏著之,其黏著間隙單邊為0.02~0.03mm最佳,但最大間隙不要>0.15mm

訂貨： TYPE E - F - G 交期： 10 天
SGR179.A 10 - F4.80 - G8.8