


SUS



型式	銷子		按鈕		鉤環		彈簧
	材質	處理	材質	處理	材質	處理	
鋼	鋼	熱處理、染黑	鋁	紅陽極	鋼	熱處理、染黑	SUS
SUS	SUS630	析出硬化			SUS	-	SUS

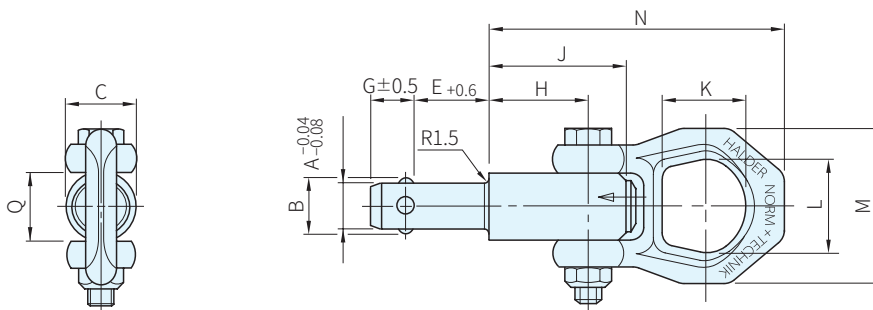

鋼品號	庫存	質量 g	SUS品號	庫存	質量 g	A	B	C	D min	E	G	H	J
22350.0601	.	218	22350.0701	△	221	8.0	9.35	21.5	9.85	10	8.75		
22350.0602		220	22350.0702		222					15			
22350.0604		223	22350.0704		225					25			
22350.0606		226	22350.0706		229					35			
22350.0611	.	218	22350.0711	△	222	8.3	9.65	21.5	10.05	10	10.20	25.7	36.0
22350.0612		219	22350.0712		223					15			
22350.0614		223	22350.0714		225					25			
22350.0616		228	22350.0716		231					35			
22350.0621	.	226	22350.0721	△	233	10.0	11.70	21.5	12.20	15	11.00		
22350.0623		238	22350.0723		243					25			
22350.0625		244	22350.0725		250					35			
22350.0627		252	22350.0727		257					50			
22350.0631	.	238	22350.0731	△	246	12.0	14.20	21.5	14.70	15	13.00		
22350.0633		243	22350.0733		255					25			
22350.0635		251	22350.0735		265					35			
22350.0637		268	22350.0737		273					50			
22350.0651	.	251	22350.0751	△	255	13.8	16.20	21.5	16.70	25	13.00		
22350.0653		279	22350.0753		283					50			
22350.0655		309	22350.0755		311					70			
22350.0641	.	312	22350.0741	△	325	16.0	18.60	25.0	19.20	25	15.10	31.0	44.5
22350.0643		353	22350.0743		367					50			
22350.0645		388	22350.0745		403					75			
22350.0673	.	607	22350.0773	△	607	20.0	24.50	30.0	25.00	50	19.70	36.5	52.0
22350.0675		666	22350.0775		666					75			

訂貨： 交期： 天 ·
 22350.0621 天 △

鋼品號	SUS品號	K	L	M	N	P min	P max	Q	F1* KN	F2* KN	F3* KN	定位孔 H11	
22350.0601	22350.0701	27.0	30	49	87.5	1.5	5	21.5	1.5	1.2	0.5	8.0	
22350.0602	22350.0702						10						
22350.0604	22350.0704						15						
22350.0606	22350.0706						5						
22350.0611	22350.0711						10						
22350.0612	22350.0712						15						
22350.0614	22350.0714						10						
22350.0616	22350.0716						15						
22350.0621	22350.0721						10						
22350.0623	22350.0723						26						10.0
22350.0625	22350.0725												
22350.0627	22350.0727												
22350.0631	22350.0731												
22350.0633	22350.0733												
22350.0635	22350.0735						3.5						3.2
22350.0637	22350.0737												
22350.0651	22350.0751												
22350.0653	22350.0753				3.8	3.5	13.8						
22350.0655	22350.0755												
22350.0641	22350.0741				92.8	15	4.8	4.5	4.1	16.0			
22350.0643	22350.0743												
22350.0645	22350.0745												
22350.0673	22350.0773												
22350.0675	22350.0775	32.6	36	56	114.0	25	30	10.0	8.5	6.5	20.0		

Ps 備註

- ・ 壓下時=鋼珠鬆開
- ・ 放開時=鋼珠鎖緊
- ・ 快速簡易的提物銷扣件，附旋轉環
- ・ 安全係數5倍
- ・ 溫度範圍max250°C
- ・ 定位襯套 22350.0910-0936可配合使用

Wa 注意

- ・ 1N = 0.101972 kgf

Ex 使用例

