


品 號		d1	l1	d2	d3	l2	l3	l4	l5	l6	l7	定位孔 H11	抗剪力雙向 kN min SUS303	抗剪力雙向 kN min SUS630	
SUS303	庫存														SUS630
22340.0153		22350.0153		70											
22340.0154		22350.0154		80											
22340.0155	△	22350.0155	△	90	12.0	14.7	9.6	35.8	24.4	49.7	15.8	9.9	10	60	100
22340.0156		22350.0156		100											
22340.0157		22350.0157		110											
22340.0158		22350.0158		120											
22340.0164		22350.0164		20											
22340.0165		22350.0165		25											
22340.0166		22350.0166		30											
22340.0167		22350.0167		35											
22340.0168		22350.0168		40											
22340.0169		22350.0169		45											
22340.0170	△	22350.0170	△	50	14.5	18.2	10.6	35.1	22.7	57.1	20.2	12.6	12	87	144
22340.0172		22350.0172		60											
22340.0174		22350.0174		70											
22340.0176		22350.0176		80											
22340.0160		22350.0160		90											
22340.0161		22350.0161		100											
22340.0162		22350.0162		110											
22340.0163		22350.0163		120											
22340.0171		22350.0171		30											
22340.0173		22350.0173		35											
22340.0175		22350.0175		40											
22340.0177		22350.0177		45											
22340.0178		22350.0178		50											
22340.0179		22350.0179		60											
22340.0180		22350.0180		70											
22340.0181	△	22350.0181	△	80	19.0	23.4	14.0	42.2	27.3	67.6	24.7	15.1	16	155	257
22340.0182		22350.0182		90											
22340.0183		22350.0183		100											
22340.0184		22350.0184		110											
22340.0185		22350.0185		120											
22340.0186		22350.0186		130											
22340.0187		22350.0187		140											
22340.0188		22350.0188		150											
22340.0189		22350.0189		50											
22340.0190		22350.0190		60											
22340.0191		22350.0191		70											
22340.0192		22350.0192		80											
22340.0193		22350.0193		90											
22340.0194	△	22350.0194	△	100	24.8	23.4	17.0	43.1	27.3	67.6	24.7	15.1	20	244	403
22340.0195		22350.0195		110											
22340.0196		22350.0196		120											
22340.0197		22350.0197		130											
22340.0198		22350.0198		140											
22340.0199		22350.0199		150											
22340.0200		22350.0200		50											
22340.0201		22350.0201		60											
22340.0202		22350.0202		70											
22340.0203		22350.0203		80											
22340.0204		22350.0204		90											
22340.0205	△	22350.0205	△	100	31.0	30.4	22.0	54.8	34.2	83.9	33.3	20.1	25	386	631
22340.0206		22350.0206		110											
22340.0207		22350.0207		120											
22340.0208		22350.0208		130											
22340.0105		22350.0105		140											
22340.0106		22350.0106		150											

特長

- 快速簡易的定位
- 人體工學型把手
- 耐腐蝕、耐磨損，高強度荷重 (SUS630)
- 溫度範圍 -30°C~+150°C
- 配合22400套環

使用例

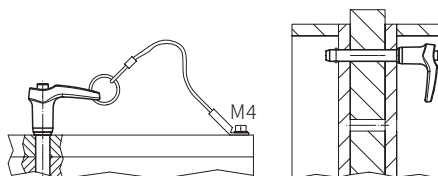

訂貨： 交期： 天

22340.0153