




銷子	彈簧	把手
材質	材質	材質
SUS303	SUS303	PA6

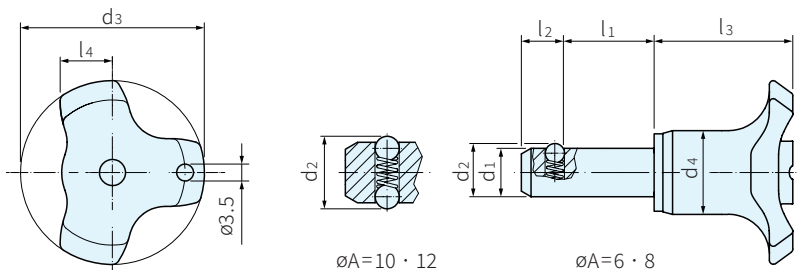


品號	d1 -0.04 -0.08	d2	d3	d4	l1 +0.6	l2 ±1	l3	l4	定位孔 H11	抗剪力雙向 KN	抗拉力 N max	質量 g	庫存
22400.0062	6	6.5	38	17.3	10	5.0	27.0	10.8	6	22	8	16	•
22400.0064					15							17	•
22400.0066					20							18	•
22400.0068					25							17	•
22400.0070					30							19	•
22400.0075	8	8.7	38	17.3	50	6.3	28.6	10.8	8	40	15	24	•
22400.0084					15							21	•
22400.0086					20							23	•
22400.0088					25							25	•
22400.0090					30							27	•
22400.0095	50	34	•										
22400.0104	10	12.0	38	17.3	15	8.7	28.6	10.8	10	62	30	30	•
22400.0106					20							34	•
22400.0108					25							37	•
22400.0110					30							40	•
22400.0115					50							52	•
22400.0122	12	14.5	38	17.3	20	9.5	28.6	10.8	12	90	32	42	•
22400.0124					30							51	•
22400.0126					40							60	•
22400.0128					50							69	•

Sp. 特長

- 快速插拔定位設計
- 耐溫範圍-30°C~+80°C
- 耐蝕不銹鋼材

Ex. 使用例



訂貨： 交期： 天

22400.0062

Wa. 注意

- 22400扣件鋼珠是由彈簧支持，和22350&22360的機構設計不同
- 可使用22400套環固定之
- 1N = 0.101972 kgf