

RoHS SUS



Type	繩子		繩子披覆		環	繩子無披覆
	材質	顏色	材質	顏色		
圖1	SUS	-	熱塑性PA6	黑、明亮	SUS	圖1 圖2 圖5 圖6
圖2		-				
圖3/圖4		-	熱塑性PVC	綠(透明)		
圖5		-	熱塑性PA6	黑、明亮		
圖6		-	熱塑性PA6	黑、明亮		
圖7		熱塑性PA6	灰	熱塑性PA6		
圖8	熱塑性PUR	黑	熱塑性PUR	黑	SUS	

圖1

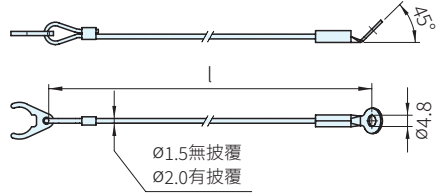
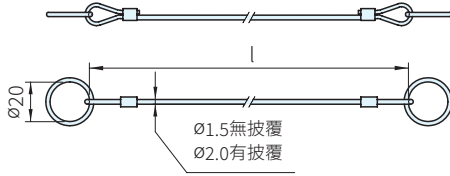


圖5

圖2

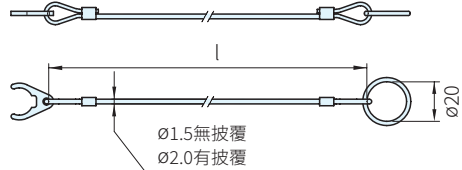
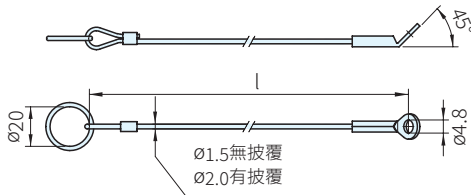


圖6

圖3


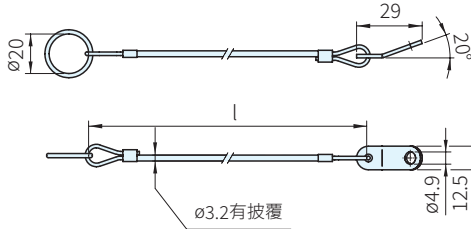


圖7

圖4

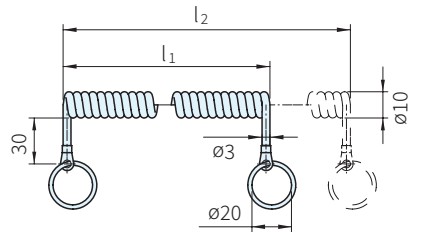
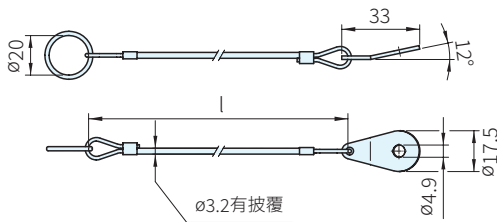


圖8

品號	型式	l	l ₁	l ₂	適用於以下尺寸	溫度(°C) max.	質量(g)	庫存
22400.0940	熱塑性 PA6 披覆	150					6.5	
22400.0941	黑色	200	-	-	-	80	6.4	△
22400.0943	圖 1	300					7.5	
22400.0945	熱塑性 PA6 披覆	150					6.9	
22400.0946	黑色	200	-	-	-	80	7.6	△
22400.0948	圖 2	300					8.6	
22400.0950	熱塑性 PA6 披覆	150					6.5	
22400.0952	明亮	200	-	-	-	80	6.4	△
22400.0956	圖 1	300					7.5	
22400.0960	熱塑性 PA6 披覆	150					6.9	
22400.0962	明亮	200	-	-	-	80	7.6	△
22400.0966	圖 2	300					8.6	
22400.0930	無披覆	150					6.5	
22400.0931	圖 1	200	-	-	-	250	6.4	△
22400.0933	圖 1	300					7.5	

品號	型式	l	l ₁	l ₂	適用於以下尺寸	溫度(°C) max.	質量(g)	庫存
22400.0935	無披覆 圖 2	150	-	-	-	250	6.9	△
22400.0936		200					7.6	
22400.0938		300					8.6	
22400.1301	熱塑性 PVC 披覆 綠色(透明) 圖 3	150	-	-	-	80	13.0	△
22400.1302		200					14.0	
22400.1303		300					16.0	
22400.1311	熱塑性 PVC 披覆 綠色(透明) 圖 4	150	-	-	-	80	13.0	△
22400.1312		200					14.0	
22400.1313		300					16.0	
22400.1001	熱塑性 PA6 披覆 明亮 圖 5	150	-	-	5/6	80	6.0	△
22400.1021					8/10		7.0	
22400.1041					12/16		8.0	
22400.1061					20/25		12.0	
22400.1002					5/6		7.0	
22400.1022		8/10			8.0			
22400.1042		12/16			9.0			
22400.1062		20/25			13.0			
22400.1003		200			5/6		8.0	
22400.1023					8/10		9.0	
22400.1043					12/16		10.0	
22400.1063					20/25		14.0	
22400.1004					300		5/6	
22400.1024		8/10					9.0	
22400.1044		12/16					10.0	
22400.1064	20/25	14.0						
22400.1101	熱塑性 PA6 披覆 黑色 圖 5	150	-	-		5/6	80	6.0
22400.1121					8/10	7.0		
22400.1141					12/16	8.0		
22400.1161					20/25	12.0		
22400.1102					5/6	7.0		
22400.1122		8/10			8.0			
22400.1142		12/16			9.0			
22400.1162		20/25			13.0			
22400.1103		200			5/6	8.0		
22400.1123					8/10	9.0		
22400.1143					12/16	10.0		
22400.1163					20/25	14.0		
22400.1104					300	5/6		8.0
22400.1124		8/10				9.0		
22400.1144		12/16				10.0		
22400.1164	20/25	14.0						
22400.1201	無披覆 圖 5	150	-	-		5/6	250	6.0
22400.1221					8/10	7.0		
22400.1241					12/16	8.0		
22400.1261					20/25	12.0		
22400.1202					5/6	7.0		
22400.1222		8/10			8.0			
22400.1242		12/16			9.0			
22400.1262		20/25			13.0			
22400.1203		200			5/6	8.0		
22400.1223					8/10	9.0		
22400.1243					12/16	10.0		
22400.1263					20/25	14.0		
22400.1204					300	5/6		8.0
22400.1224		8/10				9.0		
22400.1244		12/16				10.0		
22400.1264	20/25	14.0						
22400.1011	熱塑性 PA6 披覆 明亮 圖 6	150	-	-		5/6	80	6.0
22400.1031					8/10	7.0		
22400.1051					12/16	8.0		
22400.1071					20/25	12.0		
22400.1012					5/6	7.0		
22400.1032		8/10			8.0			
22400.1052		12/16			9.0			
22400.1072		20/25			13.0			
22400.1013		200			5/6	8.0		
22400.1033					8/10	9.0		
22400.1053					12/16	10.0		
22400.1073					20/25	14.0		
22400.1014					300	5/6		8.0
22400.1034		8/10				9.0		
22400.1054		12/16				10.0		
22400.1074	20/25	14.0						

 訂貨： 交期： 天

22400.0940

品號	型式	l	l ₁	l ₂	適用於以下尺寸	溫度 (°C) max.	質量 (g)	庫存					
22400.1111	熱塑性 PA6 披覆 黑色 圖 6	150	-	-	5/6	80	6.0	△					
22400.1131					8/10		7.0						
22400.1151					12/16		8.0						
22400.1171					20/25		12.0						
22400.1112		200			5/6		7.0						
22400.1132					8/10		8.0						
22400.1152					12/16		9.0						
22400.1172					20/25		13.0						
22400.1113		300			5/6		8.0						
22400.1133					8/10		9.0						
22400.1153					12/16		10.0						
22400.1173					20/25		14.0						
22400.1211		無披覆 圖 6			150		-		-	5/6	250	6.0	△
22400.1231										8/10		7.0	
22400.1251	12/16		8.0										
22400.1271	20/25		12.0										
22400.1212	200		5/6	7.0									
22400.1232			8/10	8.0									
22400.1252			12/16	9.0									
22400.1272			20/25	13.0									
22400.1213	300		5/6	8.0									
22400.1233			8/10	9.0									
22400.1253			12/16	10.0									
22400.1273			20/25	14.0									
22400.0970	熱塑性 PA6 灰色 圖 7		150	-	-	-		80		2.1		△	
22400.0974	250		2.7										
22400.0980	熱塑性 PUR 黑色 圖 8	-	100	600	-	80	11.5	△					
22400.0982			200	1200			17.4						

Sp 特長

- 套環搭配定位扣件如：22340/22350/22360/22370/22380/22400 以避免遺失

訂貨： 交期： 天
22400.1111

組裝

- 用軟面錘將夾子(圖5及圖6)安裝於定位扣件上，拆卸時使用螺絲起子將其撬起
- 將熱塑性型式(圖7)安裝好後，剪去兩端凸出部分
- 螺旋型式(圖8)擁有長的工作長度

PS 備註

- 特殊樣式歡迎洽詢
- 圖3和圖4符合MIL-DTL-83420規範

Ex 使用例