

RoHS SUS



本體		珠子		螺帽	
材質	處理	材質	處理	材質	處理
鋼	熱處理	SUJ2	硬化	鋼	染黑
SUS431		SUS420	鍍鎳	SUS	-

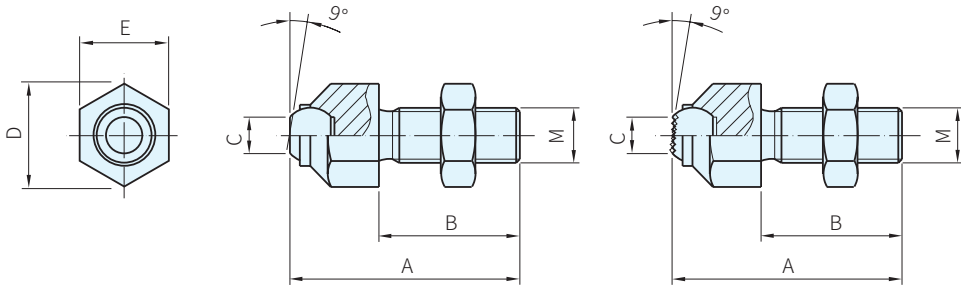


圖 1
(平面)

圖 2
(齒面)

鋼 品號	庫存	不銹鋼 品號	庫存	型式	A	B	C	D	E	M	珠子	最大荷重 KNmax.	最大力矩 max.Nm	質量 g																	
22740.0013	·	22740.0113	△	圖 1	36.6	25	5.8	14.5	13	M8	8.5	8	25	20																	
22740.0016	·	22740.0116	△		45.7	30									8.6	19.0	17	M10	12.0	15	46	44									
22740.0017	·	22740.0117	△		50.7	35																	20.0	27.0	24	M12	25.0	90	82	57	
22740.0024	·	22740.0124	△		60.7	40	33.0	30	M20	40.0	165	1355	206	131																	
22740.0030	△	22740.0130	△		77.3	50									40.0	36	M24	40.0	165	1355	407	278									
22740.0036	△	22740.0136	△		100.0	70	51.0	46	M30×1.5	40.0	165	1355	698	468																	
22740.0046	△	22740.0146	△			65									34.6	51.0	51.0	46	M30×1.5	40.0	165	1355	918								
22740.0313	·	-		圖 2	36.6	25	5.8	14.5	13	M8	8.5	8	25	20																	
22740.0316	·	-			45.7	30																		8.6	19.0	17	M10	12.0	15	46	44
22740.0317	·	-			50.7	35																									
22740.0324	·	-			60.7	40	33.0	30	M20	40.0	165	1355	206	131																	
22740.0330	△	-			77.3	50																		40.0	36	M24	40.0	165	1355	407	277
22740.0336	△	-			100.0	70	51.0	46	M30×1.5	40.0	165	1355	698	471																	
22740.0346	△	-				65									34.6	51.0	51.0	46	M30×1.5	40.0	165	1355	917								

SP 特長

· 此產品接觸面可做到自動校準貼合
夾持產品的平面

訂貨： 交期： 天 ·
22740.0013 天 △

Ex. 使用例

