

RoHS SUS



GS-100-P3A-SUS304B




GS-100-P4A-30-SUS304B




GS-100-P4A-32-SUS304B


材質	處理
SUS304	滾筒拋光






GS-100-P3A-SUS304B



GS-100-P4A-30-SUS304B



GS-100-P4A-32-SUS304B



※內置規格時，H尺寸為門厚+17mm，但GS-H160型，GS-170型的內置規格為門厚+12mm

品號	質量 (g)	庫存
GS-100-P3A-SUS304B	21.3	·
GS-100-P4A-30-SUS304B	26.4	·
GS-100-P4A-32-SUS304B	26	·


**SP. 特長**

- 帶高度調節機構
- 厚：0mm(標準厚度)

推薦螺絲

- 推薦M4扁頭小螺絲

**PS. 備註**

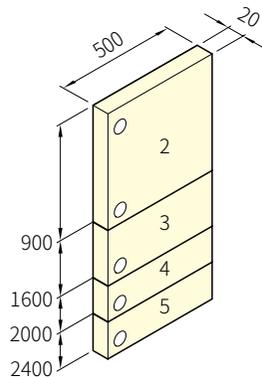

安裝底座需要數量

訂貨：  交期：  天  
GS-100-P3A-SUS304B