




| | | |
|------|--------|--------|
| 表面處理 | 鍍金 | 鍍銀 |
| | ING16A | INS16A |
| 材料 | 銅合金 | |
| 接線型式 | 冷壓工具壓接 | |
| 接觸電阻 | ≤1 MΩ | |
| 適用內膽 | CN | |
| 電流 | 16A | |

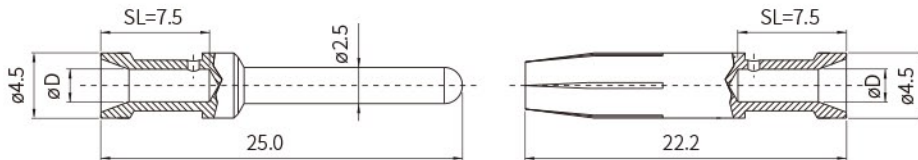

| 鍍金 品號 | | 鍍銀 品號 | | D 線徑 mm ² | D 線徑 AWG | 長度 SL |
|-------------|-------------|-------------|-------------|-------------------------|-------------|----------|
| 公插針 | 母插針 | 公插針 | 母插針 | | | |
| ING16A0037M | ING16A0037F | INS16A0037M | INS16A0037F | 0.14~0.37 | 26-22 | 7.5 |
| ING16A0050M | ING16A0050F | INS16A0050M | INS16A0050F | 0.14~0.50 | 26-20 | |
| ING16A0075M | ING16A0075F | INS16A0075M | INS16A0075F | 0.14~0.75 | 26-18 | |
| ING16A0100M | ING16A0100F | INS16A0100M | INS16A0100F | 0.14~1.00 | 26-16 | |
| ING16A0150M | ING16A0150F | INS16A0150M | INS16A0150F | 0.14~1.50 | 26-14 | |
| ING16A0250M | ING16A0250F | INS16A0250M | INS16A0250F | 0.14~2.50 | 26-12 | |
| ING16A0300M | ING16A0300F | INS16A0300M | INS16A0300F | 0.14~3.00 | | |
| ING16A0400M | ING16A0400F | INS16A0400M | INS16A0400F | 0.14~4.00 | | |

訂貨： 交期：
ING16A0037M



| | |
|------|------------------------------|
| 品號 | INTL10001 |
| 工具 | 壓線工具 |
| 線徑 | (TL1)0.14~4.0mm ² |
| 適用內膽 | CN |

| | |
|------|---------------|
| 品號 | INRL16A001 |
| 工具 | 拆線工具 |
| 線徑 | ING16A/INS16A |
| 適用內膽 | CN |

訂貨： 交期：
INRL16A001