






Type	材質	螺紋精度
CHII	SS41	JIS 1168
CHIIS	SUS304	

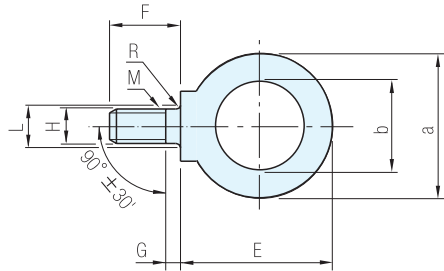

A 垂直吊



B 45°吊




品號		M × P	a	b	C	D	E	F	G	H	R	L	A N/1P	B N/2P	單價	
Type	M														CHII	CHIIS
CHII ※CHIIS (不銹鋼)	※10	10 × 1.5	41	25	8.0	20	41.5	18	4	7.7	1.2	11.2	1471	1471	•	•
	※12	12 × 1.75	50	30	10.0	25	51.0	22	5	9.4	1.4	14.2	2157	2157	•	•
	※16	16 × 2.0	60	35	12.5	30	60.0	27	5	13.0	1.6	18.2	4413	4413	•	•
	※20	20 × 2.5	72	40	16.0	35	71.0	30	6	16.4	2.0	22.4	6178	6178	•	•
	※24	24 × 3.0	90	50	20.0	45	90.0	38	8	19.6	2.5	26.4	9316	9316	•	•
	30	30 × 3.5	110	60	25.0	60	110.0	45	8	25.0	3.0	33.4	14710	14710	•	
	36	36 × 4.0	133	70	31.5	70	131.5	55	10	30.3	3.0	39.4	22555	22555	•	
	42	42 × 4.5	151	80	35.5	80	150.5	65	12	35.6	3.5	45.6	33342	33342	•	
48	48 × 5.0	170	90	40.0	90	170.0	70	12	41.0	4.0	52.6	44130	44130	•		

品號		d ₁	t ₁
Type	M		
CHII ※CHIIS (不銹鋼)	※10	13	20
	※12	16	24
	※16	20	30
	※20	24	34
	※24	28	42
	30	36	50
	36	42	60
	42	48	70
48	56	76	


■ 安裝方法

以手輕鎖至吊環面和吊物面密著，
使用2吊環時，兩吊環方向要相同

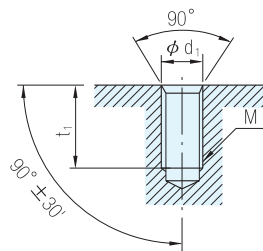


訂貨：品號 交期：1 天


CHII10
CHIIS24

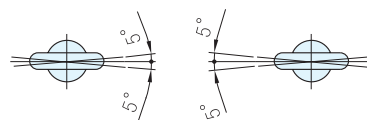

■ 請避免如下圖的使用方法



橫吊



使用2吊環時，以1條鋼索吊之