





TYPE	精密度等級	螺桿軸		螺帽	
		材質	硬度	材質	硬度
TPOH	C3 C5	S55C	中周波淬火 58~62HRC	SCM415H	浸碳淬火 58~62HRC

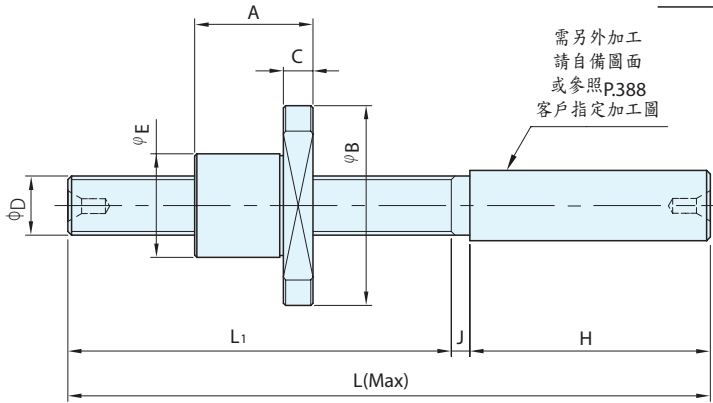

品 號							A	B	C	E	F	G	H	J	鋼珠直徑	動態負載 Ca(N)	靜態負載 Co(N)	
TYPE	桿徑 D	導程	螺桿牙長 L ₁ (mm)	螺桿總長 L(mm)	螺紋方向	螺帽方向	精度等級			-0.006 -0.017								
TPOH	4	1	L-(H+J)	(H+J)+A+20~125	右旋 (R)	正向	C3	12	20	3	10	14	40				320	400
							C5											
	6	1	L-(H+J)	(H+J)+A+20~170			C3	15	24	3.5	12	16	18	50	3	0.8	750	1330
	8	1	L-(H+J)	(H+J)+A+20~225		C3	16	27	4	14	18	21	50				850	1800
	10	4	L-(H+J)	(H+J)+A+20~455	C3	36	37	8	22	18	29	70	30	5	2.0	1700	2300	
																		C5

Ps. 備註

- L₁可指定長度(規格之外的訂製品)
- 安裝部客戶可自行加工或指定要加工尺寸
- 此圖未依比例標註

訂貨說明：

交期：請洽詢

TPOH-4-1-FS-L₁-L-R-Z-T-C5

