



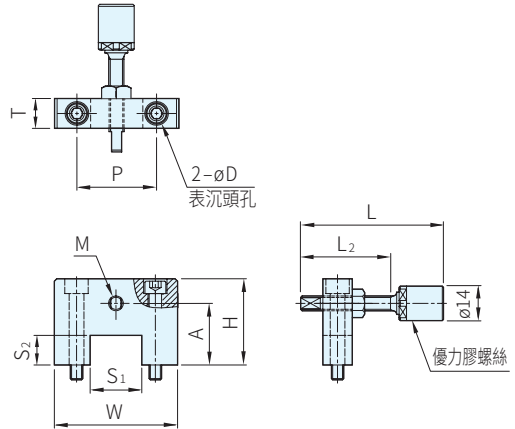

本體		螺絲		優力膠		硬度
材質	處理	材質	處理	WAT-LSEU	WAT-LESEN-U	
SS400	染黑	SCM435	染黑	WAT-SBU 15 20 25	WAT-SBUH 6 8	Shor A90
SUS304	-	SUSXM7	-			

WAT-LSEU

WAT-LESEN-U

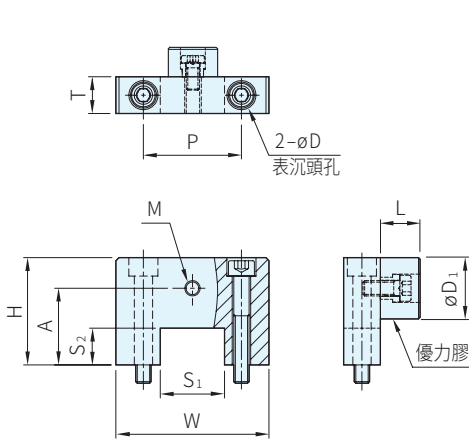

鐵		不銹鋼		線軌 尺寸	對應廠商產品			W	H	A	S ₁ ^{+0.1} ₀	S ₂	P	T	M	D	附屬品 螺絲	D ₁	L
品號	庫存	品號	庫存		IKO	NSK	THK												
WAT-LSEU-01	△	WAT-LSEU-01S	△	15	-	-	SRS15M	30	22.5		11	32	12	M4	5.5	M5×35	15	11	
WAT-LSEU-02	△	WAT-LSEU-02S	△		LWH15	LS15AL	HSR15A	38	30.5	16	16								
WAT-LSEU-03	△	WAT-LSEU-03S	△		-	LH15AN	-	43	35.5										
WAT-LSEU-04	△	WAT-LSEU-04S	△	20	-	-	SRS20M	50	35	25.0	21	12	19	M5	6.6	M5×40	20	13	
WAT-LSEU-05	△	WAT-LSEU-05S	△		LWH20	LS20AL · LH20AN	HSR20A	45	35.0		19								
WAT-LSEU-06	△	WAT-LSEU-06S	△	25	-	-	SRS25M	40	30.0		24	16	36	M5	9.0	M6×45	25	13	
WAT-LSEU-07	△	WAT-LSEU-07S	△		LWH25	LS25AL · LH25AL	HSR25A	50	40.0		23								
WAT-LSEU-08	△	WAT-LSEU-08S	△		LWH30	LS30AL · LH30AL	HSR30A	65	57	44.5	29								27
WAT-LSEU-09	△	WAT-LSEU-09S	△	35	LWH35	LS35AL · LH35AL	HSR35A	75	65	52.5	35	30	55			M8×70			

鐵		不銹鋼		線軌 尺寸	對應廠商產品			W	H	A	S ₁ ^{+0.1} ₀	S ₂	P	T	M (細牙)	D	附屬品 螺絲	
品號	庫存	品號	庫存		IKO	NSK	THK											
WAT-LESEN-01-U	△	WAT-LESEN-01S-U	△	15	-	-	SRS15M	30	23.5		11	32	12	M6×P0.75	5.5	M5×35	15	11
WAT-LESEN-02-U	△	WAT-LESEN-02S-U	△		LWH15	LS15AL	HSR15A	38	31.5	16	16							
WAT-LESEN-03-U	△	WAT-LESEN-03S-U	△		-	LH15AN	-	43	35.5									
WAT-LESEN-04-U	△	WAT-LESEN-04S-U	△	20	-	-	SRS20M	50	35	27.5	12	12	17	M8×P1.0	6.6	M5×40	20	13
WAT-LESEN-05-U	△	WAT-LESEN-05S-U	△		LWH20	LH20AN	HSR20A	45	37.5		19							
WAT-LESEN-06-U	△	WAT-LESEN-06S-U	△	25	-	-	SRS25M	40	32.5		16	16	36	M8×P1.0	9.0	M6×45	25	13
WAT-LESEN-07-U	△	WAT-LESEN-07S-U	△		LWH25	LH25AL	HSR25A	50	40.5	24	23							
WAT-LESEN-08-U	△	WAT-LESEN-08S-U	△		LWH30	LS30AL · LH30AL	HSR30A	65	57	49.5	29							
WAT-LESEN-09-U	△	WAT-LESEN-09S-U	△	30	LWH35	LS35AL · LH35AL	HSR35A	75	65	55.5	35	30	55			M8×60	25	13
WAT-LESEN-10-U	△	WAT-LESEN-10S-U	△		LWH35	LS35AL · LH35AL	HSR35A	75	65	55.5	35							
WAT-LESEN-11-U	△	WAT-LESEN-11S-U	△	35	LWH35	LS35AL · LH35AL	HSR35A	75	65	55.5	35	30	55			M8×70		

Ps. 備註

- L, L₂尺寸請參考WAT-SBUH
- 使用在線軌的防脫落和位置定位
- 附優力膠型可消除衝擊音量

Wa. 注意

- 以上產品是本公司自訂規格；記載之對應廠商產品，請貴客戶自行確認

訂貨： 交期： 天
WAT-LSEU-01