




RoHS

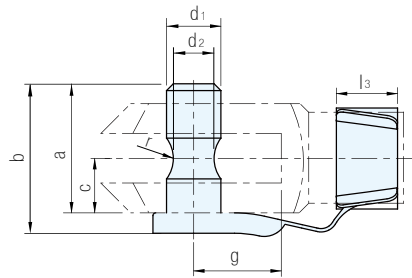

銷子		彈片	
材質	處理	材質	處理
1.0718	氮化、鍍鋅	C60~CK75	熱處理、鍍鋅

品號	適用的U接頭規格	d ₁ h11	d ₂	c	r	g	a	b	l ₁	l ₂	l ₃	單價
10.01.0004.9001.014	G 4×8	4	3	4	2.5	8	9.5	11	19	15	4.5	•
10.01.0005.9001.014	G 5×10	5	4	5	3	10	12	13.5	23	19	5.5	•
10.01.0005.9002.014	G 5×20					20			33	29		•
10.01.0006.9001.014	G 6×12	6	4.5	6	4	12	14	16	28	23	6.5	•
10.01.0006.9002.014	G 6×24					24			40	35		•
10.01.0008.9001.014	G 8×16	8	6	8	5	16	19	21.5	37	30	8	•
10.01.0008.9002.014	G 8×32					32			52	46		•
10.01.0010.9001.014	G10×20	10	7	10	6	20	23	26	46	38	10	•
10.01.0010.9002.014	G10×40					40			66	58		•
10.01.0012.9001.014	G12×24	12	9	12	8	24	28	31	53	45	12	•
10.01.0012.9002.014	G12×48					48			78	69		•
10.01.0016.9001.014	G16×32	16	12	16	12	32	36	39	73	62	16	•
10.01.0020.9001.014	G20×40	20	16	20	16	40	45	50	88	72		•

Wa) 注意

- 和U接頭結合使用
- U接頭組合請參考本章節前面

 訂貨： 交期：

10.01.0004.9001.014

Sp) 特長

- 折疊彈片銷和U接頭的組立和拆卸不需使用工具