


RoHS

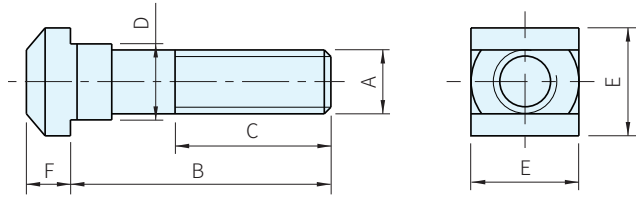

材質	處理	硬度
S45C	熱處理.染黑	HRC22~34

品號	A	B	C	D	E	F	T型槽 尺寸	質量 (g)	庫存
23030.0061	M6×1	25	15	5.6	10	4	6	7.7	•
23030.0062		40	28					10.0	•
23030.0063		63	40					14.0	•
23030.0081	M8×1.25	32	22	7.6	13	6	8	19.0	•
23030.0082		50	35					25.0	•
23030.0083		80	50					34.0	•
23030.0101	M10×1.5	40	30	9.6	15	6	10	32.0	•
23030.0102		63	45					44.0	•
23030.0103		100	60					62.0	•
23030.0121	M12×1.75	50	35	11.6	18	7	12	57.0	•
23030.0125		63*	45					66.0	•
23030.0122		80	55					79.0	•
23030.0123		125	75	111.0	•				
23030.0124		200	120	164.0	•				
23030.0141		50	35	13.6	22	8	14	76.0	•
23030.0145	63*	45	85.0					•	
23030.0142	80	55	97.0					•	
23030.0143	125	75	129.0					•	
23030.0144	200	120	182.0	•					
23030.0150	M14×2	63*	45	15.6	25	9	16	118.0	△
23030.0152		100*	65					154.0	
23030.0154		160*	100					213.0	
23030.0156		250*	150					301.0	
23030.0161	M16×2	63*	45	17.6	28	10	18	136.0	•
23030.0165		80*	55					158.0	•
23030.0162		100*	63					185.0	•
23030.0163		160*	100	263.0	•				
23030.0166		200*	125	315.0	•				
23030.0164		250*	150	381.0	•				
23030.0181		63	45	17.6	28	10	18	162.0	•
23030.0185		80*	55					184.0	•
23030.0182		100	63					210.0	•
23030.0183		160	100					289.0	•
23030.0186	200*	125	340.0					•	
23030.0184	250	150	407.0	•					

品號	A	B	C	D	E	F	T型槽 尺寸	質量 (g)	庫存
23030.0201	M20×2.5	80 <sup>*</sup>	55	19.6	32	12	20	278	•
23030.0205		100 <sup>*</sup>	65					320	•
23030.0202		125 <sup>*</sup>	85					370	•
23030.0206		160 <sup>*</sup>	100					442	•
23030.0203		200 <sup>*</sup>	125					523	•
23030.0207		250 <sup>*</sup>	150					624	•
23030.0204		315 <sup>*</sup>	190					758	•
23030.0221		80	55	21.6	35	14	22	330	•
23030.0225		100 <sup>*</sup>	65					371	•
23030.0222		125	85					422	•
23030.0226		160 <sup>*</sup>	100					494	•
23030.0223		200	125					576	•
23030.0227		250 <sup>*</sup>	150					678	•
23030.0224		315	190					800	•
23030.0281		M24×3	100	70	27.6	44	18	28	639
23030.0285	125 <sup>*</sup>		85	713					
23030.0282	160		110	814					
23030.0286	200 <sup>*</sup>		125	936					
23030.0283	250		150	1082					
23030.0287	315		190	1275					
23030.0284	400 <sup>*</sup>		240	1496					
23030.0361	M30×3.5	125	80	35.5	54	22	36	1203	△
23030.0362		200	135					1562	
23030.0363		315	200					2061	
23030.0364		500	300					2959	
23030.0421	M36×4	160	100	41.5	65	26	42	2167	△
23030.0422		250	175					2779	
23030.0423		400	250					3789	
23030.0424		600 <sup>*</sup>	340					5500	

**PS** 備註

- 23030T螺桿和23070螺帽及23050/23060華司組配，就成為完整的夾固螺栓
- 導位部銑削
- 標上<sup>\*</sup>記號的尺寸，不是DIN標準

訂貨：  交期：  天 ·  
23030.0201  天 △

**EX** 使用例