




頂料銷		彈簧	螺絲
材質	硬度		
SK4	HRC53~58	參閱彈簧、彈簧配件單元	參閱本單元


品號	零件組合		
	① 銷子	② 彈簧	③ 螺絲
GLSS	○	○	○
GLPP	○		

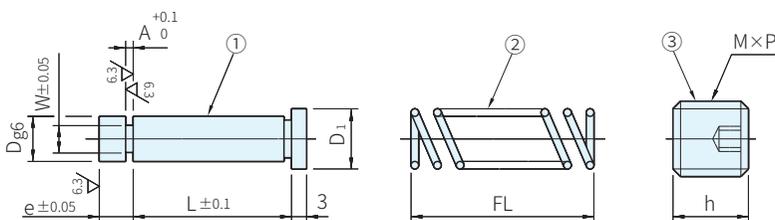


①GLPP				③NSW			品號		L																
Dg6	e	W	D1	M×P	h	TYPE	D																		
4	-0.004	7	2.0	6	8×1.25	GLSS ①②③	4	10	15	20	22	25	28	30	33	35	36	40	45	50					
6	-0.012		3.6	8	10×1.5		6	10	15	20	22	25	28	30	33	35	36	40	45	50					
8	-0.005		5.0	10	12×1.5		8		15	20	22	25	28	30	33	35	36	40	45	50	55				
10	-0.014		6.0	13	16×1.5		10			20	22	25	28	30	33	35	36	40	45	50	55				
13	-0.006	12	7.0	16	20×1.5	GLPP ①	13			20	22	25	28	30	33	35	36	40	45	50	55				
16	-0.017		8.0	19	22×1.5		16							30	33	35	36	40	45	50	55	60	70		
20	-0.007 -0.020		10.0	23	27×1.5		20										33	35	36	40	45	50	55	60	70

! ②不能自由選擇彈簧的規格尺寸也有，請依右表確認

品號		A			②彈簧		庫存	
TYPE	D				TYPE	FL	GLSS	GLPP
GLSS ①②③	4	0.5	0.8	1	AR AF AL AT	20	•	•
	6	0.5	0.8	1 1.6		25	•	•
	8	1	1.6	2		30	•	•
	10	1.6	2	2.5		35	•	•
GLPP ①	13	2	2.5	3.6	AM AH	40	•	•
						45	•	•
						50	•	•
						55	•	•
	20	3.6	5	AL, AT, AM, AH	60	•	•	
					65	•	•	
					70	•	•	
					80	•	•	
					90	•	•	
					100	•	•	

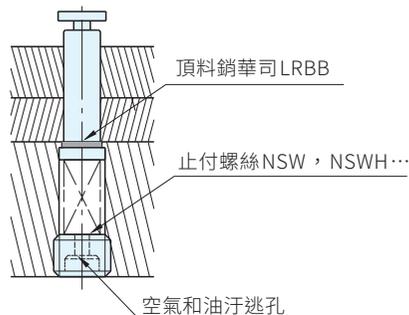

øD 3~D10...D <sup>0</sup>/<sub>-0.5</sub>  
 øD13~D27...D <sup>0</sup>/<sub>-0.8</sub>



① 銷子			② 彈簧					
品號	TYPE		AR	AF	AL	AT	AM	AH
	TYPE	D						
GLSS	4	6	N/mm 0.3	N/mm 0.5	N/mm 1.0	N/mm 2.0	N/mm 2.9	N/mm 5.9
	6	8						N/mm 9.8
	8	10						
	10	13	N/mm0.5	N/mm1.0	N/mm 2.9	N/mm 3.9	N/mm 4.9	N/mm 14.7
	13	16						
	16	18						
	20	22						
25	27							
容許壓縮量 FMAX			F=L×60%	F=L×45%	F=L×40%	F=L×40%	F=L×35%	F=L×30%

· 荷重(N)=彈簧定數(N/mm)×壓縮量mm

材質  
SWP

TYPE-D FL	GLSS4						GLSS6						GLSS8						GLSS10					
	AR6	AF6	AL6	AT6	AM6	AH6	AR8	AF8	AL8	AT8	AM8	AH8	AR10	AF10	AL10	AT10	AM10	AH10	AR13	AF13	AL13	AT13	AM13	AH13
20~40 (5mm單位)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
45	○	○	○	○	○	*	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
50	○	○	○	○	○	*	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
55	○	○	○	*	○	*	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
60	○	○	○	*	*	*	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
65	○	○	○	*	*	*	○	○	○	○	○	*	○	○	○	○	○	○	○	○	○	○	○	○
70	○	○	○	*	*	*	○	○	○	○	○	*	○	○	○	○	○	○	○	○	○	○	○	○
80	○	○	○	*	*	-	○	○	○	○	○	-	○	○	○	○	○	○	○	○	○	○	○	○
90	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

TYPE-D FL	GLSS13						GLSS16						GLSS20			
	AR16	AF16	AL16	AT16	AM16	AH16	AR18	AF18	AL18	AT18	AM18	AH18	AL22	AT22	AM22	AH22
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
30~70 (5mm單位)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
90	○	○	○	-	○	-	-	-	○	-	○	*	○	-	○	*
100	-	-	-	-	-	-	-	-	○	-	○	*	○	-	○	*

訂貨：  -  -  -  交期：  天  
 GLSS4 - 10 - 0.5 - AR40  
 GLPP4 - 10 - 0.5 -

Ps. 備註

· \* 表示容許壓縮量Fmax. 會小於上述彈簧定數表的數值，詳細請參考彈簧單元