

RoHS




圖 1




圖 2








圖 3

本體	銷子	母牙	公牙
材質 顏色	材質	材質 處理	材質 處理
PA 霧黑	SUS303	黃銅 鍍鎳	SUM22L 鍍鎳



品號	備註	A	B	C	D	E	F	G	H	N	O	L	M	J	K	質量 (g)	庫存
CFD-010	圖 1	26.5	30	22.5	12.5	15	15	9.5	2.5	15	7	-	-	M3×0.5	4	8	•
CFD-020		34	40	29	16.5	20	20	12.5	4	20	9.5			M4×0.7	5.5	19	•
CFD-030		40.5	48	35	20	24	23	15	5	24	11.5			M5×0.8	6.5	33	•
CFD-040		56	66	48.5	27.5	33	32	21	6	33	15			M6×1	9	76	•
CFD-110	圖 2	26.5	30	22.5	12.5	15	15	9.5	2.5	15	7	M3×0.5	13	-	-	11	•
CFD-120		34	40	29	16.5	20	20	12.5	4	20	9.5	M4×0.7	18			26	•
CFD-130		40.5	48	35	20	24	23	15	5	24	11.5	M5×0.8	17			46	•
CFD-140		56	66	48.5	27.5	33	32	21	6	33	15	M6×1	16			95	•
CFD-210	圖 3	26.5	30	22.5	12.5	15	15	9.5	2.5	15	7	M3×0.5	13	M3×0.5	4	10	•
CFD-220		34	40	29	16.5	20	20	12.5	4	20	9.5	M4×0.7	18	M4×0.7	5.5	23	•
CFD-230		40.5	48	35	20	24	23	15	5	24	11.5	M5×0.8	17	M5×0.8	6.5	41	•
CFD-240		56	66	48.5	27.5	33	32	21	6	33	15	M6×1	16	M6×1	9	90	•

Ex. 使用例




Sp. 特長

- ・本體寬度大小不同
- ・旋轉角度max.215°

訂貨： 品號 交期： 1 天

CFD-010

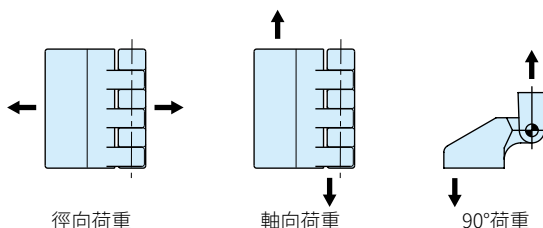

品號	備註	徑向荷重		軸向荷重		90°荷重		最大鎖緊扭矩 (N·m)
		容許荷重 Er(N)	破損荷重 Rr(N)	容許荷重 Ea(N)	破損荷重 Ra(N)	容許荷重 E90(N)	破損荷重 R90(N)	
CFD-010	圖 1	70	490	60	690	60	500	1
CFD-020		150	1340	160	1710	100	700	4
CFD-030		260	1700	260	2440	120	1640	>5
CFD-040		320	2520	450	4130	220	2250	5
CFD-110	圖 2	40	340	70	750	30	390	1
CFD-120		140	880	110	1230	50	730	1.5
CFD-130		240	1840	290	1770	110	1740	3
CFD-140		260	1700	470	3260	240	1580	>5
CFD-210	圖 3	40	340	60	690	30	390	1
CFD-220		140	880	110	1230	50	700	4
CFD-230		240	1700	260	1770	110	1640	>5
CFD-240		260	1700	450	3260	220	1580	5